



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

BILL OF MATERIALS

PROPOSED TWO-STOREY RESIDENCE



Perspective View of the Proposed Two-Storey Residence

PROJECT LOCATION:	_____
OWNER:	_____
PROJECT CODE:	RMP-2026-001
TOTAL FLOOR AREA:	178.70 SQ.M
ITEM SUMMARY:	General Requirements Siteworks Civil / Structural Works Architectural Works Plumbing Works Electrical Works Tinsmithry / Roofing Works Metal Works Cabinetry and other Finishing Works

PREPARED BY:

ENGR. RON MAR B. PANGILINAN, RCE

PRC NO. : _____
VALIDITY : _____
PTR NO. : _____
ISSUED ON : _____
ISSUED AT : _____
TIN NO. : _____



RMP ENGINEERING SERVICES

Address: #391 Bgry. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com, Contact: +63960-244-6185

Date:

Project: PROPOSED TWO STOREY RESIDENCE

Location:

Owner:

Floor Area:

178.7 sq.m

Lot Area:

160 sq.m

BILL OF MATERIALS

Item No.	Item Description	Quantity	Unit	Unit Price, Php	Amount, Php
I.	GENERAL REQUIREMENTS				
	• Design (1 set tracing & 7 complete sets blue print) (all signed and sealed)	1.00	ls	200,000.00	200,000.00
	• Building Permit	1.00	ls	30,000.00	30,000.00
	• Provision of temporary board up, covers, safety signages	1.00	ls	20,000.00	20,000.00
	• Temfacil	1.00	ls	25,000.00	25,000.00
	• Occupancy Permits (Owner's Supply)				-
	• Power and Water Utilities and Consumption (Owner's Supply)				-
				Sub Total =	275,000.00
II.	SITEWORKS				
	• Mobilization/Demobilization/Site Clearing	1.00	lot	45,000.00	45,000.00
	• Excavation Works	52.14	cu.m	350.00	18,249.00
	• Backfilling Works	94.90	cu.m	250.00	23,724.00
	• Lot Relocation	1.00	lot	8,000.00	8,000.00
	• Staking Out/Layout	1.00	lot	2,500.00	2,500.00
	• Soil Poisoning	160.00	sq.m	180.00	28,800.00
	• Gravel Bed	17.20	cu.m	1,000.00	17,196.00
				Sub Total =	143,469.00
				Labor Cost =	57,387.60
III.	CIVIL/STRUCTURAL WORKS				
III.i.	CONCRETING/MASONRY WORKS/REINFORCEMENTS				
	RC Footings (3000 PSI)	6.77	cu.m		
	• Cement	51.00	bgs	250.00	12,750.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00
	• 16 mmø def bar (6 meters)	48.00	pcs	480.00	23,040.00
	• 10 mmø def bar (6 meters)	8.00	pcs	230.00	1,840.00
	• GI Tie Wire # 16	5.00	kgs	85.00	425.00
	RC Columns (3000 PSI)	9.43	cu.m		
	• Cement	71.00	bgs	250.00	17,750.00
	• Sand	5.00	cu.m	1,000.00	5,000.00
	• Gravel 3/4"	10.00	cu.m	1,450.00	14,500.00
	• 16 mmø def bar (6 meters)	140.00	pcs	480.00	67,200.00
	• 10 mmø def bar (6 meters)	139.00	pcs	230.00	31,970.00
	• GI Tie Wire # 16	19.00	kgs	85.00	1,615.00
	Tie Beams (3000 PSI)	3.49	cu.m		
	• Cement	27.00	bgs	250.00	6,750.00
	• Sand	2.00	cu.m	1,000.00	2,000.00
	• Gravel 3/4"	4.00	cu.m	1,450.00	5,800.00
	• 12 mmø def bar (6 meters)	57.00	pcs	290.00	16,530.00
	• 10 mmø def bar (6 meters)	49.00	pcs	230.00	11,270.00
	• GI Tie Wire # 16	5.00	kgs	85.00	425.00
	Slab on Grade (3000 PSI)	11.63	cu.m		
	• Cement	88.00	bgs	250.00	22,000.00
	• Sand	6.00	cu.m	1,000.00	6,000.00
	• Gravel 3/4"	12.00	cu.m	1,450.00	17,400.00
	• 10 mmø def bar (6 meters)	127.00	pcs	230.00	29,210.00
	• GI Tie Wire # 16	5.00	kgs	85.00	425.00
	Suspended Beams (3000 PSI)	5.33	cu.m		
	• Cement	41.00	bgs	250.00	10,250.00
	• Sand	3.00	cu.m	1,000.00	3,000.00
	• Gravel 3/4"	6.00	cu.m	1,450.00	8,700.00
	• 16 mmø def bar (6 meters)	67.00	pcs	480.00	32,160.00

	• 10 mmø def bar (6 meters)	87.00	pcs	230.00	20,010.00
	• GI Tie Wire # 16	10.00	kgs	85.00	850.00
	Roof Beams (3000 PSI)	5.42	cu.m		
	• Cement	41.00	bgs	250.00	10,250.00
	• Sand	3.00	cu.m	1,000.00	3,000.00
	• Gravel 3/4"	6.00	cu.m	1,450.00	8,700.00
	• 12 mmø def bar (6 meters)	102.00	pcs	290.00	29,580.00
	• 10 mmø def bar (6 meters)	69.00	pcs	230.00	15,870.00
	• GI Tie Wire # 16	8.00	kgs	85.00	680.00
	Suspended Slab (3000 PSI)	6.09	cu.m		
	• Cement	46.00	bgs	250.00	11,500.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00
	• 12 mmø def bar (6 meters)	210.00	pcs	290.00	60,900.00
	• GI Tie Wire # 16	12.00	kgs	85.00	1,020.00
	Masonry Works	245.16	sq.m		
	• Concrete hollow block - 4"	944.00	pcs	15.00	14,160.00
	• Concrete hollow block - 6"	2428.00	pcs	18.00	43,704.00
	• Cement	227.00	bgs	250.00	56,750.00
	• Sand	19.00	cu.m	1,000.00	19,000.00
	• 10 mmø def bar (6 meters)	189.00	pcs	230.00	43,470.00
	• GI Tie Wire # 16	7.00	kgs	85.00	595.00
	Stiffener Columns, Lintel Beams, Cannopys and Staircase	4.30	cu.m		
	• Cement	26.00	bgs	250.00	6,500.00
	• Sand	3.00	cu.m	1,000.00	3,000.00
	• Gravel 3/4"	5.00	cu.m	1,450.00	7,250.00
	• 12 mmø def bar (6 meters)	45.00	pcs	290.00	13,050.00
	• 10 mmø def bar (6 meters)	32.00	pcs	230.00	7,360.00
	• GI Tie Wire # 16	4.00	kgs	85.00	340.00
	Exterior & Interior Plastering	490.32	sq.m		
	• Cement	124.00	bgs	250.00	31,000.00
	• Sand	11.00	cu.m	1,000.00	11,000.00
	Stairs (3000 PSI)	1.97	cu.m		
	• Cement	15.00	bgs	250.00	3,750.00
	• Sand	1.00	cu.m	1,000.00	1,000.00
	• Gravel 3/4"	2.00	cu.m	1,450.00	2,900.00
	• 16 mmø def bar (6 meters)	14.00	pcs	480.00	6,720.00
	• 12 mmø def bar (6 meters)	23.00	pcs	290.00	6,670.00
	• 10 mmø def bar (6 meters)	3.00	pcs	230.00	690.00
	• GI Tie Wire # 16	3.00	kgs	85.00	255.00
	• Consumables/miscellaneous	1.00	lot	0.10	2,198.50
				Sub Total =	820,032.50
				Labor Cost =	328,013.00
III.II.	FORMWORKS	170.26	sqm		
	• Phenolic Board (4 x 8 x 1/2)	81.00	pcs	700.00	56,700.00
	• CWN Assorted Nail	117.00	kgs	80.00	9,360.00
	• Lumber for formworks (2" x 3" and 2" x 2")	5197.00	bd.ft	60.00	311,820.00
	• Standard H-Frame Set (1.2 x 1.7)	4.00	set	450.00	3,600.00
	• Platforms/Catwalk	8.00	pcs	350.00	5,600.00
	• Consumables/miscellaneous	1.00	lot	5%	19,354.00
				Sub Total =	406,434.00
				Labor Cost =	162,573.60
IV.	ARCHITECTURAL WORKS				
IV.I	CEILING WORKS	202.35	sqm		
	• Metal Furring (JEAMaxx G.24)	63.00	pcs	130.00	8,190.00
	• Carrying Channel (JEAMaxx G.24)	59.00	pcs	140.00	8,260.00
	• Double U-Clip (JEAMaxx)	391.00	pcs	5.00	1,955.00
	• Wall Angle (JEAMaxx G.24)	148.00	pcs	80.00	11,840.00
	• Blind rivets 1/8" dia. X 1/2" (1000 PCS PER BOX)	4.00	boxes	450.00	1,800.00
	• Gypsum Board (9mm)	53.00	pcs	750.00	39,750.00
	• Gypsum Mesh Tape	6.00	pcs	120.00	720.00
	• Metal Spandrel (0.15 x 0.8)	603.00	pcs	75.00	45,225.00

	• black screw	1866.00	pcs	1.00	1,866.00
	• Consumables/miscellaneous	1.00	lot	10%	11,960.60
				Sub Total =	131,566.60
				Labor Cost =	52,626.64
IV.ii	DOORS & GLASSES	43.47	sqm		
	GLASSES				
	• GLASS ENCLOSURE	2.00	set	15,000.00	30,000.00
	• Sliding Door (2-panel 1.6 x 2.1 with 1/4" Bronze glass & analog finish)	2.00	set	20,000.00	40,000.00
	• Fixed Window With 1/4" Glass (1.2 x 2.1)	1.00	set	12,000.00	12,000.00
	• Awning Windows & Fixed (0.6 x 0.6)	2.00	set	3,000.00	6,000.00
	• Exterior Windows (1.0 x 1.2)	7.00	set	5,000.00	35,000.00
	• Exterior Windows (1.0 x 1.0)	3.00	set	5,000.00	15,000.00
	• Fixed Window With Glass (0.6 x 5.4)	3.00	set	18,000.00	54,000.00
	DOORS				
	• Matwood Solid Panel Doors (1.2 x 2.1) WITH ACCESSORIES	1.00	set	20,000.00	20,000.00
	• Matwood Panel Type Doors (0.8 x 2.1)	3.00	set	18,000.00	54,000.00
	• Matwood Panel Type Doors (0.7 x 2.1)	1.00	set	15,000.00	15,000.00
	• CR Door - Painted Flush Door (0.8 x 2.1)	2.00	set	10,000.00	20,000.00
				Sub Total =	301,000.00
				Labor Cost =	120,400.00
IV.iii	TILE WORKS (Supply and installation of wall and floor tiles)	175.14	sqm		
	• Porcelain (0.60x0.60)	145.00	pcs	350.00	50,750.00
	• Anti-Slip Ceramic (0.40x0.40)	130.00	pcs	70.00	9,100.00
	• Anti-Slip Ceramic (0.30x0.30)	62.00	pcs	40.00	2,480.00
	• Porcelain (0.20x0.60)	145.00	pcs	200.00	29,000.00
	• Marble Tile (0.30x0.30)	36.00	pcs	100.00	3,600.00
	• Wood-look Tile (0.15x0.60)	414.00	pcs	120.00	49,680.00
	• Wood-look Tile (0.20x1.0)	252.00	pcs	170.00	42,840.00
	• Herringbone Brick (0.20x0.10)	481.00	pcs	40.00	19,240.00
	• Tile Adhesive	16.00	bags	350.00	5,600.00
	• Tile Adhesive (Heavy Duty)	6.00	bags	530.00	3,180.00
	• Cement	56.00	bgs	250.00	14,000.00
	• Sand	5.00	cu.m	1,000.00	5,000.00
	• Tile Grout (2kg)	46.00	bags	113.00	5,198.00
	• tile spacers	4736.00	pcs	2.00	9,472.00
	• Consumables/miscellaneous	1.00	lot	5%	12,457.00
				Sub Total =	261,597.00
				Labor Cost =	104,638.80
IV.iv	PAINTING WORKS	2080.5431	sqm		
	• Acrytex Primer B-1705	7.00	gal.	1,200.00	8,400.00
	• Permacoat Flat B-701	17.00	gal.	850.00	14,450.00
	• Red Oxide Metal Primer B-310	54.00	gal.	950.00	51,300.00
	• Acrytex Topcoat 2 Coats	13.00	gal.	1,200.00	15,600.00
	• Permacoat Latex Semi-Gloss 2 Coats	24.00	gal.	850.00	20,400.00
	• Permacoat Latex Flat 2 Coats	11.00	gal.	850.00	9,350.00
	• Quick Drying Enamel 2 Coats	107.00	gal.	1,000.00	107,000.00
	• Skim Coat (25 kg)	87.00	bags	500.00	43,500.00
	• # 7 paint roller	20.00	pcs	85.00	1,700.00
	• # 2 paint brush	20.00	pcs	50.00	1,000.00
	• Sand Paper	300.00	pcs	15.00	4,500.00
	• Consumables/miscellaneous	1.00	lot	5%	13,860.00
				Sub Total =	291,060.00
				Labor Cost =	116,424.00
V.	PLUMBING WORKS				
V.i.	SEWERLINE				
	• 4"Ø uPVC Sanitary Pipe (S-1000)	8.00	pcs	1,000.00	8,000.00
	• 3"Ø uPVC Sanitary Pipe (S-1000)	14.00	pcs	670.00	9,380.00
	• 2"Ø uPVC Sanitary Pipe (S-1000)	3.00	pcs	350.00	1,050.00
	• 3"Ø uPVC Sanitary Pipe Elbow (90deg)	5.00	pcs	80.00	400.00
	• 4"Ø uPVC Sanitary Pipe Elbow (45deg)	8.00	pcs	120.00	960.00
	• 3"Ø uPVC Sanitary Pipe Elbow (45deg)	3.00	pcs	70.00	210.00
	• 2"Ø uPVC Sanitary Pipe Elbow (45deg)	9.00	pcs	50.00	450.00
	• 4"Ø uPVC Sanitary WYE	5.00	pcs	150.00	750.00
	• 4"x 2" Ø uPVC Sanitary WYE Reducer	8.00	pcs	150.00	1,200.00
	• 2"Ø uPVC P-trap	8.00	pcs	130.00	1,040.00
	• 4"Ø uPVC Clean out	3.00	pcs	100.00	300.00

	•	Floor Drains	4.00	pcs	150.00	600.00
	•	Consumables/miscellaneous	1.00	lot	10%	2,434.00
V.ii.	WATER LINE					
	•	1/2"Ø uPVC Pipe (3m)	16.00	pcs	150.00	2,400.00
	•	1/2"Ø uPVC Plain Elbow	13.00	pcs	25.00	325.00
	•	1/2"Ø uPVC Plain Tee	9.00	pcs	25.00	225.00
	•	1/2"Ø uPVC Female Threaded Elbow	10.00	pcs	55.00	550.00
	•	1/2" Ø uPVC Coupling	9.00	pcs	20.00	180.00
	•	Angle Valve	3.00	pcs	180.00	540.00
	•	Angle Valve 2 way	2.00	pcs	250.00	500.00
	•	Gate Valve	1.00	pcs	300.00	300.00
	•	Water Meter	1.00	lot	600.00	600.00
	•	Check Valve	1.00	pcs	300.00	300.00
	•	Consumables/miscellaneous	1.00	lot	10%	592.00
V.iii.	PLUMBING FIXTURES					
	•	Kitchen Stainless Sink (FRANKE SSX-110-45) (OSM)	1.00	unit	9,000.00	9,000.00
	•	Goose Neck Faucet (KASCH)	1.00	pcs	2,000.00	2,000.00
	•	Sink Drain and Accessories	1.00	pcs	800.00	800.00
	•	Lavatory (Pozzi Chegda)	2.00	unit	5,000.00	10,000.00
	•	Faucet (KASCH LJ-5003, faucet 304 SS)	2.00	pcs	3,000.00	6,000.00
	•	Lavatory Accessories	1.00	lot	2,000.00	2,000.00
	•	Water Closet (Pozzi)	2.00	unit	10,750.00	21,500.00
	•	Stainless Bidet	2.00	pcs	2,000.00	4,000.00
	•	Flexible Hoses	2.00	pcs	300.00	600.00
	•	Shower with accessories	2.00	set	10,000.00	20,000.00
	•	Pipe Fittings	1.00	lot	15,000.00	15,000.00
	•	Water Heater Panasonic	2.00	unit	9,000.00	18,000.00
V.iv.	SEPTIC TANK AND CATCH BASIN		9.45 & 0.3	cu.m		
	•	Concrete hollow block - 4"	22.00	pcs	15.00	330.00
	•	Concrete hollow block - 6"	322.00	pcs	18.00	5,796.00
	•	Cement	49.00	bgs	250.00	12,250.00
	•	Sand	4.00	cu.m	1,000.00	4,000.00
	•	Gravel 3/4"	2.00	cu.m	1,450.00	2,900.00
	•	12 mmØ def bar (Grade 33)	8.00	pcs	290.00	2,320.00
	•	10 mmØ def bar (Grade 33)	35.00	pcs	230.00	8,050.00
	•	GI WIRE No. 16	2.00	kgs	85.00	170.00
	•	4"Ø Sanitary PVC Pipe (S-1000)	1.00	pcs	1,000.00	1,000.00
	•	4"Ø Clean Out	4.00	pcs	150.00	600.00
	•	4"Ø Sanitary Tee	4.00	pcs	200.00	800.00
	•	Consumables/miscellaneous	1.00	lot	10%	3,821.60
					Sub Total =	184,223.60
					Labor Cost =	73,689.44
VI.	ELECTRICAL WORKS					
VI.i.	Wiring And Piping					
	•	20mmØ PVC Pipe (Neltex)	72.00	pcs	180.00	12,960.00
	•	5.5 mm² THHN (Phelps Dodge)	80.00	lm	90.00	7,200.00
	•	3.5 mm² THHN (Phelps Dodge)	350.00	l.m	60.00	21,000.00
	•	Switches				
	•	1 gang switch (Panasonic)	3.00	pcs	250.00	750.00
	•	2 gang switch (Panasonic)	4.00	pcs	250.00	1,000.00
	•	3 gang switch (Panasonic)	4.00	pcs	250.00	1,000.00
	•	Outlets				
	•	2 gang Convenience Outlet Universal (Panasonic)	18.00	pcs	350.00	6,300.00
	•	AC .WH, Ref Outlets	6.00	pcs	350.00	2,100.00
	•	Lighting Fixtures				
	•	Ceiling Mounted Light (40watts)	22.00	pcs	500.00	11,000.00
	•	Centerlights	7.00	pcs	1,000.00	7,000.00
	•	1x18W PHILIPS FS 13804 GLASS RECESSED WHITE W/ 9W ESS LEDBULB E27	6.00	pcs	250.00	1,500.00
VI.ii.	Panel Board (GE or Specs. Of the Bldg. Admin.)					
	•	100A	1.00	pcs	2,000.00	2,000.00
	•	BRANCHES				
	•	30AT/50AF	3.00	pcs	750.00	2,250.00
	•	20AT/50AF	11.00	pcs	500.00	5,500.00
	•	PANEL BOARD	1.00	SET	5,000.00	5,000.00
	•	Electrical Tape	10.00	pcs	80.00	800.00

	•	Pvc Pipe Fittings	1.00	lot	15,000.00	15,000.00
	•	Utility Box	35.00	pcs	25.00	875.00
	•	Junction Box	35.00	pcs	35.00	1,225.00
	•	Exhaust Fan {XFC - 300 OMNI (12 inches)}	2.00	pcs	1,200.00	2,400.00
VI.iii.	Service Entrance Installation					
	•	1" RSC PIPE	1.00	pcs	1,250.00	1,250.00
	•	1" RECEPTACLE	1.00	pcs	120.00	120.00
	•	Pipe Clamps	6.00	pcs	200.00	1,200.00
	•	30 mm² THHN (Phelps Dodge)	70.00	mtrs	380.00	26,600.00
	•	Base meter	1.00	pcs	1,500.00	1,500.00
					Sub Total =	137,530.00
					Labor Cost =	55,012.00
VII.	TINSMITHRY/ROOFING WORKS					
	•	Roof framing and Roof Installation	132.89	sq.m		
	•	Rib Type Longspan Roof	167.00	lm	450.00	75,150.00
	•	Tubular Rafter (2" x 6" x 1.5mm thck)	21.00	pcs	1,400.00	29,400.00
	•	C-Purlins (2" x 3" x 1.5mm thck)	60.00	pcs	650.00	39,000.00
	•	GI Sheet, Plain GA 26 (1.22 x 2.44) (Flashing & Gutter 24" cut)	21.00	pcs	750.00	15,750.00
	•	Hardieflex Senepa (4' x 8' x 9mm thck)	7.00	pcs	1,300.00	9,100.00
	•	1.5" Roof Screws	1740.00	pcs	2.00	3,480.00
	•	12 mmø Sagrods rebar	20.00	pcs	290.00	5,800.00
	•	10mm double foil insulation (50 meters)	4.00	roll	3,200.00	12,800.00
	•	Consumables/miscellaneous	1.00	lot	10%	19,048.00
					Sub Total =	209,528.00
					Labor Cost =	83,811.20
VIII.	Metal Works					
	•	Metal Entrance Gate and Side Gate (2x4 Tubular Painted) & Handrails	1.00	lot	15,000.00	15,000.00
	•	Stair Railings	1.00	lot	35,000.00	35,000.00
	•	Balcony Railings	1.00	lot	15,000.00	15,000.00
	•	(OTHERS SPECIFY)		lot		-
					Sub Total =	65,000.00
					Labor Cost =	26,000.00
IX.	Cabinetry and other Finishing Works		22.80	sq.m		
	•	Cabinetries	1.00	lot		
	•	Plyboard	9.00	pcs	1,250.00	11,250.00
	•	Hydraulic Hinges	12.00	pcs	150.00	1,800.00
	•	Handles	6.00	pcs	180.00	1,080.00
	•	Lamination	9.00	pcs	1,000.00	9,000.00
	•	Slider	4.00	pcs	650.00	2,600.00
	•	Consumables/miscellaneous	1.00	lot	10%	2,573.00
					Sub Total =	28,303.00
					Labor Cost=	22,500.00

EXCLUSION:

- Furnitures and Appliances
- Bookshelves, modular counter top and kitchen overhead cabinets
- Aircondition units and Equipments
- Landscaping
- Perimeter Concrete Fence, Pedestrian and Main Driveway Gate

MATERIAL COST:	3,254,743.70
LABOR COST:	1,203,076.28
TOTAL DIRECT COST:	4,457,819.98
Miscellaneous and Contingency:	445,782.00
Project Supervision/Overhead Cost:	356,625.60
VAT and Taxes:	534,938.40
TOTAL INDIRECT COST:	1,337,345.99

TOTAL PROJECT COST:	₱5,795,165.97
TOTAL AMOUNT IN WORDS:	
FIVE MILLION SEVEN HUNDRED NINETY-FIVE THOUSAND ONE HUNDRED SIXTY-FIVE PESOS AND NINETY-SEVEN CENTAVOS ONLY	

PREPARED BY:

ENGR. RON MAR B. PANGILIINAN, RCE
RMP Engineering Services

APPROVED/ACKNOWLEDGE BY:

NAME
OWNER



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

DETAILED ESTIMATES

Project: PROPOSED TWO STOREY RESIDENCE
Detailed Estimate of: SITEWORKS

EXCAVATION					
Label	No. pcs	Length, m	Width, m	Height, m	Volume
F1	11.00	1.20	1.20	1.60	25.35
F2	3.00	1.00	1.00	1.60	4.80
Tie Beam	1.00	41.44	0.20	0.40	3.32
Septic Tank	1.00	3.50	1.50	1.90	9.98
Total Volume:					52.14

BACKFILLING					
Label	No. pcs	Length, m	Width, m	Height, m	Volume
F1					19.80
F2					3.90
SOG					55.38
Total Volume:					94.90

GRAVEL BEDDING					
Label	No. pcs	Length, m	Width, m	Height, m	Volume
F1	11.00	1.20	1.20	0.10	1.59
F2	3.00	1.00	1.00	0.10	0.30
Tie Beam	1.00	41.44	0.20	0.10	0.83
SOG					11.08
Septic Tank	1.00	3.50	1.50	0.10	0.53
Total Volume:					17.20

Project: PROPOSED TWO STOREY RESIDENCE
Detailed Estimate of: RC Footings (3000 PSI)
Concreting and Reinforcement

CC: 0.075
Spc Bot: 0.2
Spc Top: 0.2

CONCRETING					
Label	No. pcs	Length, m	Width, m	Thickness, m	Volume
F1	11.00	1.20	1.20	0.35	5.55
F2	3.00	1.00	1.00	0.30	0.90
Total Volume:					6.77

REINFORCEMENT					
Bottom Bars Label	Number of pcs.		Length of Bars		Total Length
	Along Length	Along Width	Along Length	Along Width	
F1 16 mm	7.00	7.00	1.45	1.45	223.30
F2 16 mm	6.00	6.00	1.15	1.15	41.40
Total Length:					288.00
Top Bars					
F2 10 mm	6.00	6.00	1.15	1.15	41.40
Total Length:					48.00

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16	48.00	1.578298397	6	454.5499383	4.545499383
12		0.887792848	6	0	0
10	8.00	0.616522811	6	29.59309494	0.295930949
			Total kg of Steel	484.1430333	
				Total kg of GI:	4.841430333



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.04

Detailed Estimate of: RC Columns (3000 PSI)

Concreting and Reinforcement

CONCRETING					
Label	No. pcs	Length, m	Width, m	Height, m	Volume
C1	11.00	0.40	0.20	8.86	7.80
C2	3.00	0.40	0.20	4.90	1.18

Total Volume: 9.43

REINFORCEMENT (Vertical Bar 16mm)						
Label	A	B	C	D	E	Total Length, m
C1	16.38	24.00	7.14	10.20	4.11	680.13
C2	30.94					92.82


Total Length: 840

REINFORCEMENT (Ties 10mm)						
Label	Perimeter	Hook Length	Bend Length	Ties Length	Total, pcs	Total Length, m
C1	0.88	0.21	0.12	0.97	693	672.21
C2	1.2			0.97	102	98.94

Total Length: 834

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16	140.00	1.578298397	6	1325.770654	13.25770654
12		0.887792848	6	0	0
10	139.00	0.616522811	6	514.1800247	5.141800247
Total kg of Steel				1839.950678	
Total kg of GI:				18.39950678	

COLUMN CUTTING LIST

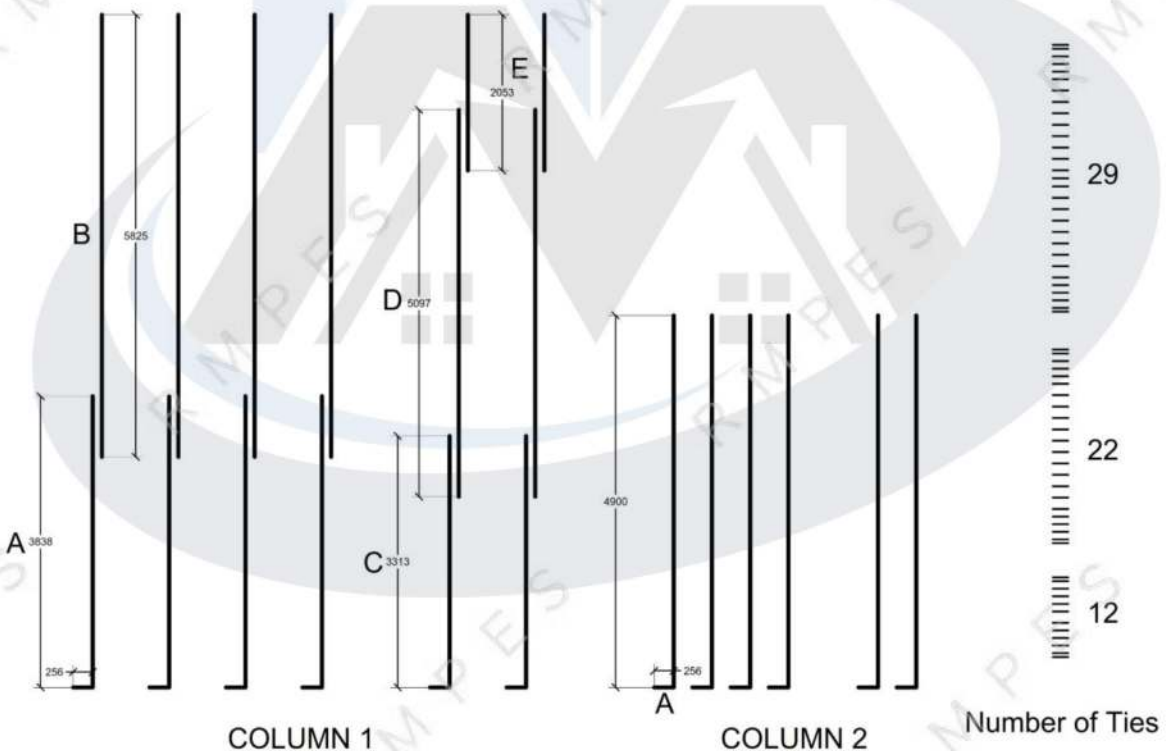



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

COLUMN FORMWORKS				3	Height, m
Surface Area	Forms 4x8 pcs	Frames 2x2 bd.ft	Supports bd.ft.		
			Vert. 2x3	Hor. 2x2	Brace 2x2
50.40	28	718	330	988	551

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.02

Detailed Estimate of: Suspended Beams (3000 PSI)

Concreting and Reinforcement

CONCRETING				
Label	Depth, m	Width, m	Length, m	Volume
B1	0.40	0.20	57.89	4.64
B2	0.40	0.20	5.50	0.44

Total Volume: 5.33

REINFORCEMENT 16mm	
Label	Length, m
B1.2	64.17
B1.3	64.47
B1.4	66.79
B1.5	64.17
B1.A	28.95
B1.B	16.83
B1.C	32.29
B2.D	33.37


Total Length: 402

REINFORCEMENT 10mm						
Label	Perimeter	Hook Length	Bend Length	Ties Length	Total, pcs	Total Length, m
B1 & B2	1.04	0.21	0.12	1.13	425	480.25

Total Length: 522

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16	67.00	1.578298397	6	634.4759556	6.344759556
12		0.887792848	6	0	0
10	87.00	0.616522811	6	321.8249075	3.218249075
			Total kg of Steel	956.3008631	
			Total kg of GI:		9.563008631

2F BEAM CUTTING LIST


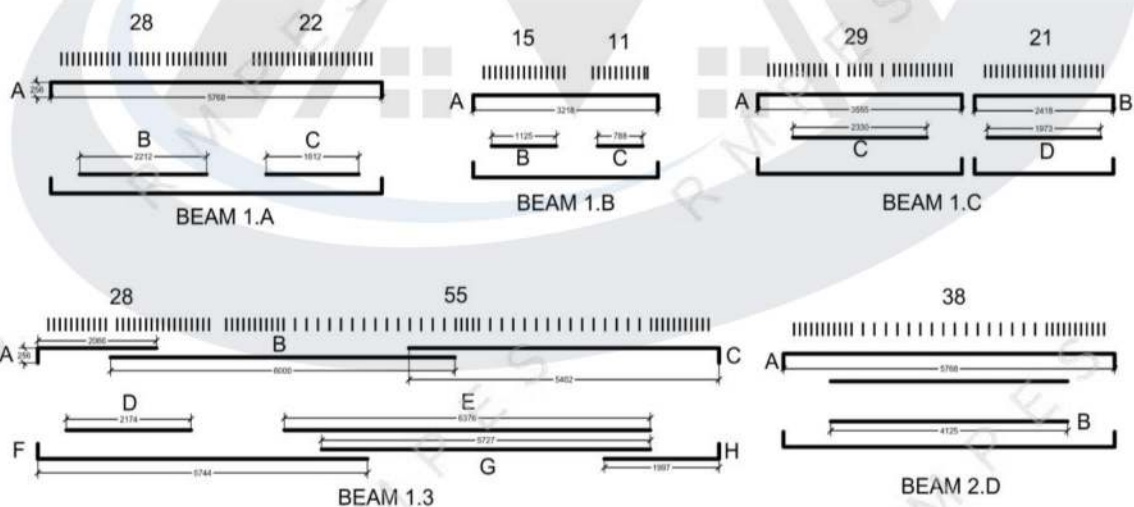




RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

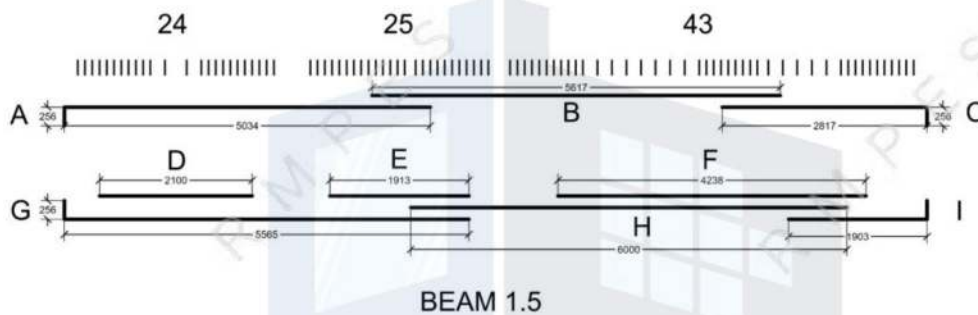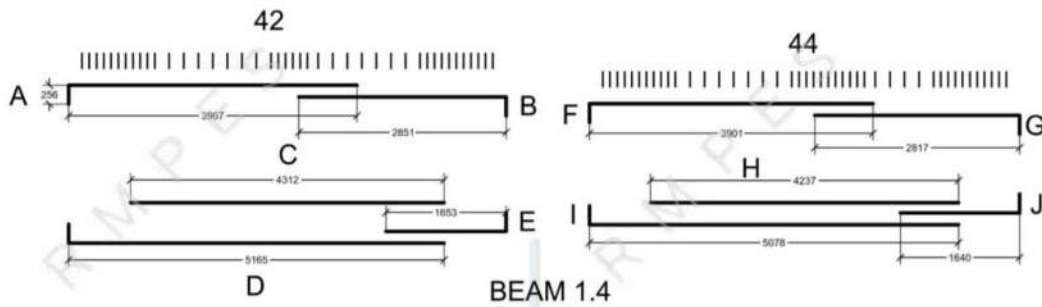

BEAMS FORMWORKS					
Surface Area	Forms 4x8 pcs	Frames 2x2 bd.ft	Supports bd.ft.		
			Vert. 2x3	Hor. 2x2	
73.59	35	1255	495	388	

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.04

Detailed Estimate of: Tie Beams (3000 PSI)

Concreting and Reinforcement

CONCRETING				
Label	Depth, m	Width, m	Length, m	Volume
TB1	0.40	0.20	41.44	3.32
Total Volume:				3.49

REINFORCEMENT 12mm	
Label	Length, m
TB1	316.06
Total Length: 342	

REINFORCEMENT 10mm				
Label	Perimeter	Stirrups Length	Total, pcs	Total Length, m
TB1	1.2	0.97	278	269.66
Total Length:				294

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12	57.00	0.887792848	6	303.6251541	3.036251541
10	49.00	0.616522811	6	181.2577065	1.812577065
Total kg of Steel				484.8828607	
				Total kg of GI:	4.848828607



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.02

Detailed Estimate of: Roof Beams (3000 PSI)

Concreting and Reinforcement

CONCRETING				
Label	Depth, m	Width, m	Length, m	Volume
RB1	0.35	0.20	73.59	5.16
Total Volume:				5.42

REINFORCEMENT 12mm	
Label	Length, m
RB1	561.16
Total Length: 612	

REINFORCEMENT 10mm						
Label	Perimeter	Hook Length	Bend Length	Ties Length	Total, pcs	Total Length, m
RB1	0.94	0.21	0.12	1.03	369	380.07
Total Length:						414

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12	102.00	0.887792848	6	543.3292232	5.433292232
10	69.00	0.616522811	6	255.2404439	2.552404439
			Total kg of Steel	798.5696671	
			Total kg of GI:		7.985696671

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.02

Detailed Estimate of: Suspended Slab (3000 PSI)

Concreting and Reinforcement

CONCRETING			
Label	Total Area	Thickness, m	Volume
One-way Slab	41.62	0.125	5.21
Two-way Slab	4.65	0.125	0.59
Total Volume:			6.09

REINFORCEMENT 12mm	
Label	Length, m
One-way Slab	1025.38
Two-way Slab	140.66
Total Length: 1260	

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12	210.00	0.887792848	6	1118.618989	11.18618989
10		0.616522811	6	0	0
			Total kg of Steel	1118.618989	
			Total kg of GI:		11.18618989

SLAB FORMWORKS				
Surface Area	Forms 4x8 pcs	2.88	Scaffolding and Staging bd.ft.	
46.27	18	1.62	472	



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

Project: PROPOSED TWO STOREY RESIDENCE

CC: 0.025

Detailed Estimate of: Slab on Grade (3000 PSI)

Concreting and Reinforcement

CONCRETING			
Label	Total Area	Thickness, m	Volume
SOG	110.76	0.100	11.08

Total Volume: 11.63

REINFORCEMENT 10mm	
Label	Length, m
SOG	704.80

Total Length: 762

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL KGS OF REINFORCEMENT	GI WIRE KG
16		1.578298397	6	0	0
12		0.887792848	6	0	0
10	127.00	0.616522811	6	469.7903822	4.697903822
Total kg of Steel				469.7903822	
				Total kg of GI:	4.697903822


Project: PROPOSED TWO STOREY RESIDENCE

Detailed Estimate of: Stairs (3000 PSI)

Concreting and Reinforcement

CONCRETING			COLUMN & FOOTING		
Labels	Values	Units	Labels	Values	Units
Riser Height	0.20	m	Footing Width	1.00	m
Thread Run	0.25	m	Footing Thck.	0.35	m
Stair Width	1.00	m	Column Height	1.15	m
Number of Steps	16.00	pcs	Column Width	0.20	m
Stringer Thickness	0.15	m	Dowels	0.56	m
Volume of Stair Ftng.	0.58	cu.m			
Slab Volume	0.13	cu.m			
Volume of Steps	0.40	cu.m			
Volume of Stringer	0.77	cu.m			

Total Volume: 1.97

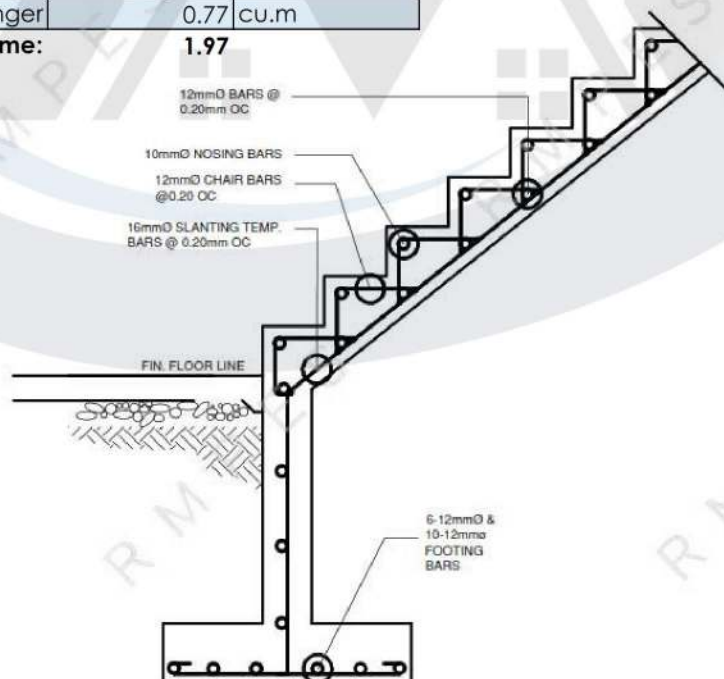

DETAILED ESTIMATES | PROPOSED TWO-STOREY RESIDENCE



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

REINFORCEMENT OF STAIRS			
Labels	Diameter, mm	Spc & Pcs	Total Length, m
Stringer Lateral Bar	0.016	0.20	30.73
Stringer Horizontal Bar	0.012	2.00	32.00
Chair Bar	0.012	0.20	66.24
Nosing Bar	0.01	1.00	16.00

REINFORCEMENT OF FOOTING, COLUMN, & SLAB			
Labels	Length, m	Spc & Pcs	Total Length, m
Column 16mm	1.76	0.20	24.44
Horizontal Bar 12mm	1.00	0.20	9.00
FTG. Along X 12mm	1.25	6.00	7.50
FTG Along Y 12mm	1.25	10.00	12.50
SLAB Top 16mm	1.30	0.20	7.80
SLAB Bot 16mm	1.86	0.20	11.17

Total Length:

10mm	18
12mm	138
16mm	84

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16	14.00	1.578298397	6	132.5770654	1.325770654
12	23.00	0.887792848	6	122.5154131	1.225154131
10	3.00	0.616522811	6	11.0974106	0.110974106
Total kg of Steel				266.189889	
				Total kg of GI:	2.66189889

Project: PROPOSED TWO STOREY RESIDENCE

Detailed Estimate of: Masonry Works

Exterior & Interior Plastering

MASONRY AND PLASTERING		
Label		Area
External Perimeter Wall (6")	1st Flr.	94.2
	2nd Flr.	115.92
Internal Partition Wall (4")	1st Flr.	29.11
	2nd Flr.	49.4
D1, D5		9.24
D2, D3, D4		9.87
W1, W2, W3, W4, W5		24.36
Total Ext. Area:		176.52
Total Int. Area:		68.64
Plaster Area:		490.32

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12		0.887792848	6	0	0
10	189.00	0.616522811	6	699.1368681	6.991368681
Total kg of Steel				699.1368681	
				Total kg of GI:	6.991368681



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12		0.887792848	6	0	0
10	189.00	0.616522811	6	699.1368681	6.991368681
			Total kg of Steel	699.1368681	
				Total kg of GI:	6.991368681

CONCRETING STIFFENERS COLUMN AND LINTEL BEAM				
Label	Depth, m	Width, m	Length, m	Volume, cu.m
Stiffeners Column	1% of Structural Framing Volume			0.30
Lintel Beam	0.20	0.15	34.10	1.03
Stair Beam	0.30	0.15	2.15	0.10
Canopies	0.08	0.30	34.10	0.82
Accent Canopies				1.84

Total Volume: 4.30

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12	45.00	0.887792848	6	239.7040691	2.397040691
10	32.00	0.616522811	6	118.3723798	1.183723798
			Total kg of Steel	358.0764488	
				Total kg of GI:	3.580764488

Project: PROPOSED TWO STOREY RESIDENCE

Detailed Estimate of: TINSMITHRY/ROOFING WORKS

RIB TYPE LONG SPAN ROOF				0.95	1.00
Label	Length	Width	Area	Longspan, lm	Insulation
Roof 1	7.9	9.2	68.55	79.00	79
Roof 2	5.05	6	30.30	35.35	30.3
Roof 3	3.7	9.2	34.04	37.00	37

Total, lm: 167 200

STEEL RAFTER (2" X 6" X 1.5mm)		
Label	Length	No. pcs (6m)
Roof 1	52.45	9
Roof 2	25.25	5
Roof 3	25.9	5

Total, pcs: 21



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

C PURLINS (2" X 3" X 1.5mm)			
Label	Fascia Length	Purlins @ 0.6m	No. pcs (6m)
Roof 1	34.2	121.55	26
Roof 2	22.1	54	13
Roof 3	25.8	64.4	16

Total, pcs: 60
Screws, pcs: 1740
Sagrods 12mm: 20

FLAHING AND GUTTER		
Label	Length	No. pcs (2.4)
Flashing	57.7	26
Gutter	24.4	11

Considering 24" Cut

Total, pcs: 21
Fascia, pcs: 7

Ficem board

Project: PROPOSED TWO STOREY RESIDENCE
Detailed Estimate of: CEILING WORKS

CEILING WORKS						
Label	Perimeter, m	Area, sq.m	Board, pcs	Wall Angle, pcs	Furring, pcs	Channel, pcs
1st Floor	76.41	85.41	30	32	17	32
2nd Floor	77	51.26	18	33	10	21
Total, pcs:			53	148	63	59

OTHER MATERIALS	
Label	Total, pcs
Double U-Clip	391
Blind Rivets	3562
Black Screws	1866
Gypsum Mesh 75m	6

Perimeter of brd.
7.2

ROOF EAVES CEILING WORKS				
Label	Area, sqm	Spandrel, pcs	Wall Angle, pcs	Furring, pcs
Roof Soffit	65.68	603	69	30

0.15 x 0.8
dimension

69
furring 0.8m 1.2 Spc

Project: PROPOSED TWO STOREY RESIDENCE
Detailed Estimate of: TILE WORKS (Supply and installation of wall and floor tiles)

TILES WORKS			
Label	Area of Tile	Area, sq.m	Tiles, pcs
Porcelain (0.60x0.60)	0.36	46.47	145
Anti-Slip Ceramic (0.40x0.40)	0.16	18.55	130
Anti-Slip Ceramic (0.30x0.30)	0.09	4.93	62
Porcelain (0.20x0.60)	0.12	15.48	145
Marble Tile (0.30x0.30)	0.09	2.88	36
Wood-look Tile (0.15x0.60)	0.09	33.26	414
Wood-look Tile (0.20x1.0)	0.2	44.99	252
Herringbone Brick (0.20x0.10)	0.02	8.58	481

Total Area: 175.14



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102
 Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

Project: PROPOSED TWO STOREY RESIDENCE Detailed Estimate of: PAINTING WORKS

PAINTING WORKS	
Label	Area
Exterior Walls	176.52
Interior Walls	313.80
Ceiling	136.67
Roof Steel	1453.55

MATERIALS	Quantity
Primer	
Acrytex Primer B-1705	7
Permacoat Flat B-701	17
Red Oxide Metal Primer B-310	54
Top Coat	
Acrytex Topcoat 2 Coats	13
Permacoat Latex Semi-Gloss 2 Coats	24
Permacoat Latex Flat 2 Coats	11
Quick Drying Enamel 2 Coats	107
Other Materials	
Skimcoats	87

Project: PROPOSED TWO STOREY RESIDENCE Detailed Estimate of: SEPTIC TANK AND CATCH BASIN

SEPTIC TANK									
Label	Perimeter, m	Area, sq.m	Plaster Area, sq.m	CHB 6", pcs	Cement, bgs	Sand, cu.m	Gravel, cu.m	Reinforcement, m	
Masonry and Plastering	13.00	23.40	28.80	322.00	34.08	2.83		10mm	12mm
								54.33	40.44
Top and Bottom Slab	Volume:	1.58			12.40	0.83	1.65	129.60	

Catch Basin									
Label	Perimeter, m	Area, sq.m	Plaster Area, sq.m	CHB 4", pcs	Cement, bgs	Sand, cu.m	Gravel, cu.m	Reinforcement, m	
Masonry and Plastering	4.00	1.60	1.60	22.00	1.38	0.12		10mm	12mm
								5.06	5.70
Top and Bottom Slab	Volume:	0.10			0.79	0.05	0.11	17.28	

TOTAL: bgs cu.m cu.m pcs pcs
 49.00 4.00 2.00 35.00 8.00

GI WIRE CALCULATOR 1 %					
SIZE	PCS	KG/M	LENGTH	TOTAL kgs of reinforcement	GI WIRE KG
16		1.578298397	6	0	0
12	8	0.887792848	6	42.61405672	0.426140567
10	35.00	0.616522811	6	129.4697904	1.294697904
			Total kg of Steel	172.0838471	
			Total kg of GI:		1.720838471