



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

BILL OF MATERIALS

PROPOSED TWO-STOREY RESIDENTIAL



Perspective View of the Proposed Two-Storey Residential

PROJECT LOCATION:	
OWNER:	
PROJECT CODE:	RMP-2026-003
TOTAL FLOOR AREA:	198.04 SQ.M
ITEM SUMMARY:	Siteworks Concrete Works Reinforcement Works Formworks Ceiling Works Tile Works

PREPARED BY:

ENGR. RON MAR B. PANGILINAN, RCE

PRC NO. : _____
VALIDITY : _____
PTR NO. : _____
ISSUED ON : _____
ISSUED AT : _____
TIN NO. : _____



RMP ENGINEERING SERVICES

Address: #391 Bgry. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Panglinan.ronmarb@gmail.com, Contact: +63960-244-6185

Date:

Project: PROPOSED TWO STOREY RESIDENTIAL

Location:

Owner:

Floor Area: 198.04 sq.m

Lot Area: sq.m

BILL OF MATERIALS

Item No.	Item Description	Quantity	Unit	Unit Price, Php	Amount, Php
I.	SITEWORKS				
	• Mobilization/Demobilization/Site Clearing	1.00	lot	45,000.00	45,000.00
	• Excavation Works	45.60	cu.m	350.00	15,960.00
	• Backfilling Works	87.38	cu.m	250.00	21,846.00
	• Lot Relocation	1.00	lot	8,000.00	8,000.00
	• Staking Out/Layout	1.00	lot	2,500.00	2,500.00
	• Soil Poisoning	110.00	sq.m	180.00	19,800.00
	• Gravel Bed	11.64	cu.m	1,000.00	11,640.00
				Sub Total =	124,746.00
				Labor Cost =	49,898.40
II.	CIVIL/STRUCTURAL WORKS				
III.I.	CONCRETING/REINFORCEMENTS				
	Lean Concrete (2500 PSI)	1.89	cu.m		
	• Cement	12.00	bgs	250.00	3,000.00
	• Sand	1.00	cu.m	1,000.00	1,000.00
	• Gravel 3/4"	2.00	cu.m	1,450.00	2,900.00
	RC Footings (4000 PSI)	6.00	cu.m		
	• Cement	72.00	bgs	250.00	18,000.00
	• Sand	3.00	cu.m	1,000.00	3,000.00
	• Gravel 3/4"	6.00	cu.m	1,450.00	8,700.00
	• 16 mmø def bar (6 meters)	45.00	pcs	480.00	21,600.00
	• GI Tie Wire # 16	5.00	kgs	85.00	425.00
	RC Columns (4000 PSI)	12.62	cu.m		
	• Cement	152.00	bgs	250.00	38,000.00
	• Sand	7.00	cu.m	1,000.00	7,000.00
	• Gravel 3/4"	13.00	cu.m	1,450.00	18,850.00
	• 16 mmø def bar (6 meters)	95.00	pcs	480.00	45,600.00
	• 12 mmø def bar (6 meters)	58.00	pcs	290.00	16,820.00
	• 10 mmø def bar (6 meters)	335.00	pcs	230.00	77,050.00
	• GI Tie Wire # 16	25.00	kgs	85.00	2,125.00
	Footing Tie Beams (4000 PSI)	3.69	cu.m		
	• Cement	45.00	bgs	250.00	11,250.00
	• Sand	2.00	cu.m	1,000.00	2,000.00
	• Gravel 3/4"	4.00	cu.m	1,450.00	5,800.00
	• 16 mmø def bar (6 meters)	57.00	pcs	480.00	27,360.00
	• 10 mmø def bar (6 meters)	81.00	pcs	230.00	18,630.00
	• GI Tie Wire # 16	9.00	kgs	85.00	765.00
	Slab on Grade (3500 PSI)	9.82	cu.m		
	• Cement	89.00	bgs	250.00	22,250.00
	• Sand	5.00	cu.m	1,000.00	5,000.00
	• Gravel 3/4"	10.00	cu.m	1,450.00	14,500.00
	• 10 mmø def bar (6 meters)	95.00	pcs	230.00	21,850.00
	• GI Tie Wire # 16	4.00	kgs	85.00	340.00
	Suspended Beams (4000 PSI)	6.38	cu.m		
	• Cement	77.00	bgs	250.00	19,250.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00
	• 16 mmø def bar (6 meters)	96.00	pcs	480.00	46,080.00
	• 10 mmø def bar (6 meters)	140.00	pcs	230.00	32,200.00
	• GI Tie Wire # 16	15.00	kgs	85.00	1,275.00
	Roof Beams (4000 PSI)	2.78	cu.m		
	• Cement	34.00	bgs	250.00	8,500.00
	• Sand	2.00	cu.m	1,000.00	2,000.00
	• Gravel 3/4"	3.00	cu.m	1,450.00	4,350.00
	• 12 mmø def bar (6 meters)	43.00	pcs	290.00	12,470.00
	• 10 mmø def bar (6 meters)	71.00	pcs	230.00	16,330.00
	• GI Tie Wire # 16	7.00	kgs	85.00	595.00
	Suspended Slab (4000 PSI)	6.69	cu.m		
	• Cement	81.00	bgs	250.00	20,250.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00

	• 10 mmø def bar (6 meters)	231.00	pcs	230.00	53,130.00
	• GI Tie Wire # 16	9.00	kgs	85.00	765.00
				Sub Total =	639,310.00
				Labor Cost =	255,724.00
III.ii.	FORMWORKS	261.91	sqm		
	• Phenolic Board (4 x 8 x 1/2)	128.00	pcs	700.00	89,600.00
	• CWN Assorted Nail	200.00	kgs	80.00	16,000.00
	• Lumber for formworks (2" x 3" and 2" x 2")	8872.00	bd.ft	60.00	532,320.00
	• Standard H-Frame Set (1.2 x 1.7)	4.00	set	450.00	3,600.00
	• Platforms/Catwalk	8.00	pcs	350.00	5,600.00
	• Consumables/miscellaneous	1.00	lot	10%	64,712.00
				Sub Total =	711,832.00
				Labor Cost =	284,732.80
IV.	ARCHITECTURAL WORKS				
IV.i	CEILING WORKS	163.2	sqm		
	• Metal Furring (JEAMaxx G.24)	70.00	pcs	130.00	9,100.00
	• Carrying Channel (JEAMaxx G.24)	37.00	pcs	140.00	5,180.00
	• Double U-Clip (JEAMAx)	242.00	pcs	5.00	1,210.00
	• Wall Angle (JEAMaxx G.24)	109.00	pcs	80.00	8,720.00
	• Blind rivets 1/8" dia. X 1/2" (1000 PCS PER BOX)	3.00	boxes	450.00	1,350.00
	• 3.5mm Thk. Ficem Board	48.00	pcs	630.00	30,240.00
	• PVC Spandrel (0.25x0.8)	206.00	pcs	150.00	30,900.00
	• Mesh Tape	6.00	pcs	120.00	720.00
	• black screw	1690.00	pcs	1.00	1,690.00
	• Consumables/miscellaneous	1.00	lot	10%	8,911.00
				Sub Total =	98,021.00
				Labor Cost =	39,208.40
IV.iii	TILE WORKS (Supply and installation of wall and floor tiles)	177.77	sqm		
	• 0.3x0.3 Non-skid Ceramic Tiles	184.00	pcs	180.00	33,120.00
	• 0.3x0.3 Non-skid Textured Ceramic Tiles	32.00	pcs	65.00	2,080.00
	• 0.4x0.4 Ceramic Tiles	376.00	pcs	75.00	28,200.00
	• 0.4x0.4 Non-skid Ceramic Tiles	62.00	pcs	80.00	4,960.00
	• 0.6x0.6 Ceramic Tiles	421.00	pcs	65.00	27,365.00
	• Solid Wood Plank	5.74	sqm	4,000.00	22,960.00
	• Consumables/miscellaneous	1.00	lot	10%	11,868.50
				Sub Total =	130,553.50
				Labor Cost =	52,221.40

MATERIAL COST:	1,704,462.50
LABOR COST:	681,785.00
TOTAL DIRECT COST:	2,386,247.50
Miscellaneous and Contingency:	238,624.75
Project Supervision/Overhead Cost:	190,899.80
VAT and Taxes:	286,349.70
TOTAL INDIRECT COST:	715,874.25

TOTAL PROJECT COST:	₱3,102,121.75
TOTAL AMOUNT IN WORDS:	THREE MILLION ONE HUNDRED TWO THOUSAND ONE HUNDRED TWENTY-ONE PESOS AND SEVENTY-FIVE CENTAVOS ONLY

EXCLUSION:

- General Requirements – Building permits, fees, and temporary facilities
- Masonry, Staircase, and Plastering Works
- Doors, Glazing, and Painting Works
- Plumbing and Sanitary Works – Drainage, water lines, fixtures, and septic tank
- Furniture and Appliances
- Bookshelves, Modular Countertops, and Kitchen Overhead Cabinets
- Air-Conditioning Units and Equipment
- Landscaping Works
- Perimeter Concrete Fence, Pedestrian Gate, and Main Driveway Gate
- Tinsmithing and Roofing Works
- Metal Works, Railings, and Metal Gates
- Woodworks and Cabinetry
- Electrical Works – Wiring, Conduits, Panel Board, and Service Entrance

PREPARED BY:

ENGR. RON MAR B. PANGILIINAN, RCE
RMP Engineering Services

APPROVED/ACKNOWLEDGE BY:

NAME
OWNER




RMP ENGINEERING SERVICES


Address: #391 Bgry. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com, Contact: +63960-244-6185

CONSTRUCTION QUANTITY TAKE-OFF


Name	Description	Qty	Units
SITEWORKS			
TOTAL EXCAVATION		38	CU M
TOTAL GRAVEL BEDDING		9.7	CU M
TOTAL BACKFILLING		72.82	CU M
CONCRETING			
Lean Concrete		1.89	CU M
Footing Concrete		5.71	CU M
FTB Concrete		3.51	CU M
SOG Concrete		9.35	CU M
Column Concrete		12.02	CU M
Suspended Beam Concrete		6.08	CU M
S-1 Concrete		6.37	CU M
RB-1 Concrete		2.65	CU M
REBAR			
FOOTING			
16mm Dia. Footing Rebar		245.76	M
COLUMN			
16mm Column Rebar		526.88	M
12mm Column Rebar		317.6	M
10mm Column Rebar		1855.75	M
FTB-1			
16mm FTB-1 Rebar		313.1	M
10mm FTB-1 Rebar		448.14	M
SOG			
10mm SOG Rebar		525.12	M
SUSPENDED BEAMS			
16mm Suspended Beams		532.85	M
10mm Suspended Beams		773.68	M
SUSPENDED SLABS			
10mm S-1 Rebar		1281.43	M
ROOF BEAMS			
12mm RB-1 Main Rebar		238.76	M
10mm Roof Beam Rebar		393.96	M
FORMWORKS			
TOTAL HEIGHT		92	M
COLUMN FORMWORKS		110.4	SQ M
TOTAL LENGTH		87.28	M
SUSPENDED BEAM FORMWORKS		87.28	SQ M
SLAB FORMWORKS		64.23	SQ M
CEILING WORKS			
TOTAL PERIMETER		235.36	M
3.5mm THK Ficem Board		122.19	SQ M
PVC SPANDREL		41.01	SQ M
TILE WORKS			
0.3x0.3 Non-skid Ceramic Tiles		14.71	SQ M
0.3x0.3 Non-skid Textured Ceramic Tiles		2.52	SQ M
0.4x0.4 Ceramic Tiles		53.7	SQ M
0.4x0.4 Non-skid Ceramic Tiles		8.81	SQ M
0.6x0.6 Ceramic Tiles		50.66	SQ M
Plain Cement Groove Finish		41.63	SQ M
Solid Wood Plank		5.74	SQ M

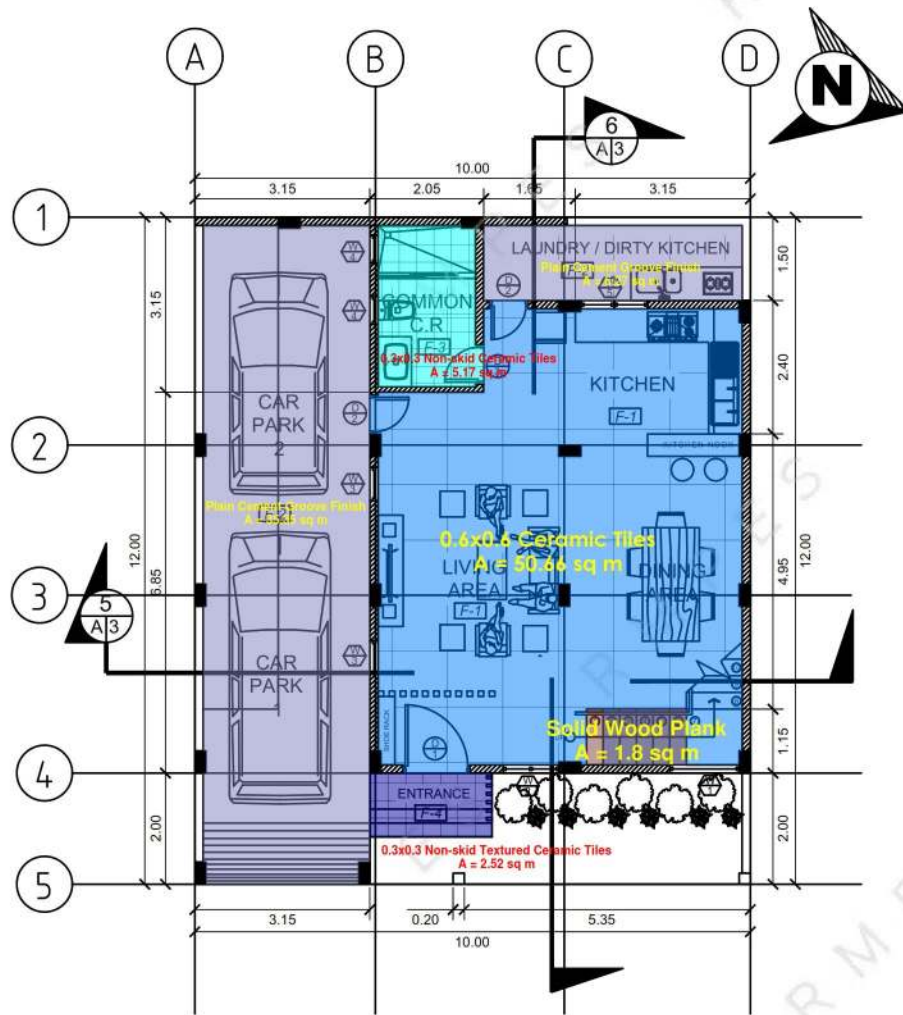

1 GROUND FLOOR PLAN
A-2 SCALE 1:75M

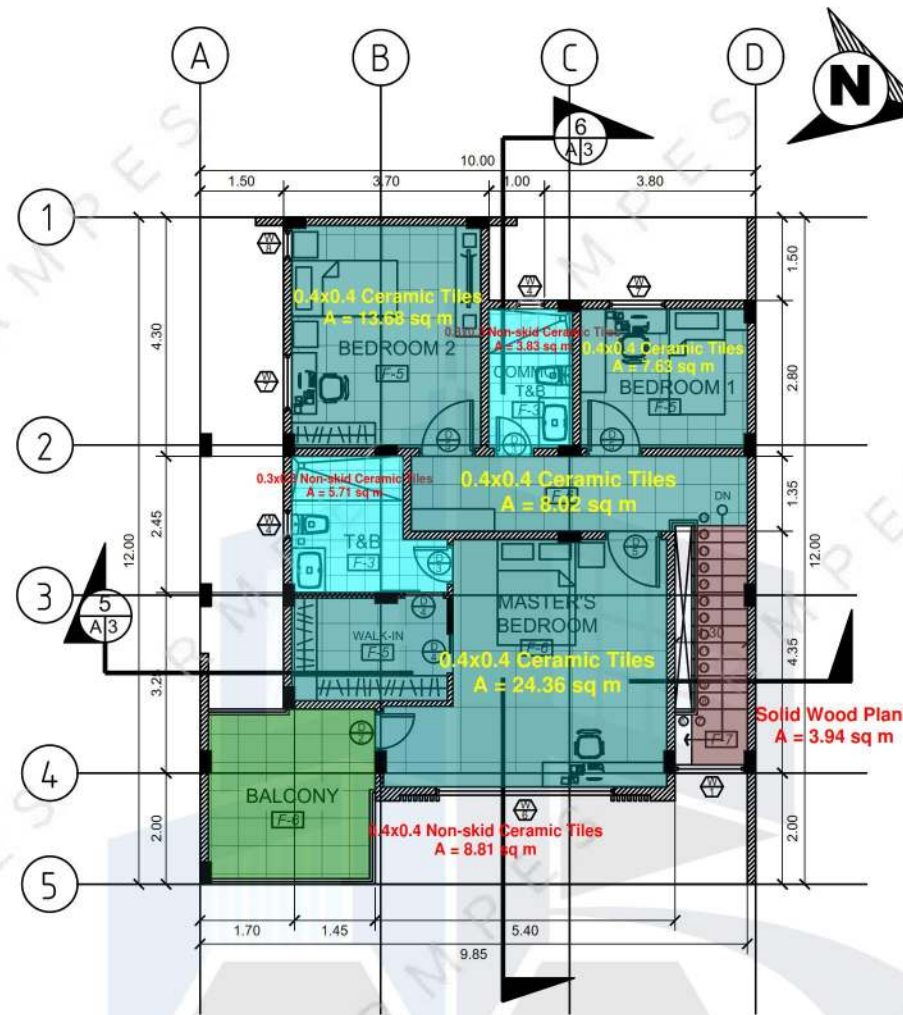

2 SECOND FLOOR PLAN
A-2 SCALE 1:75M

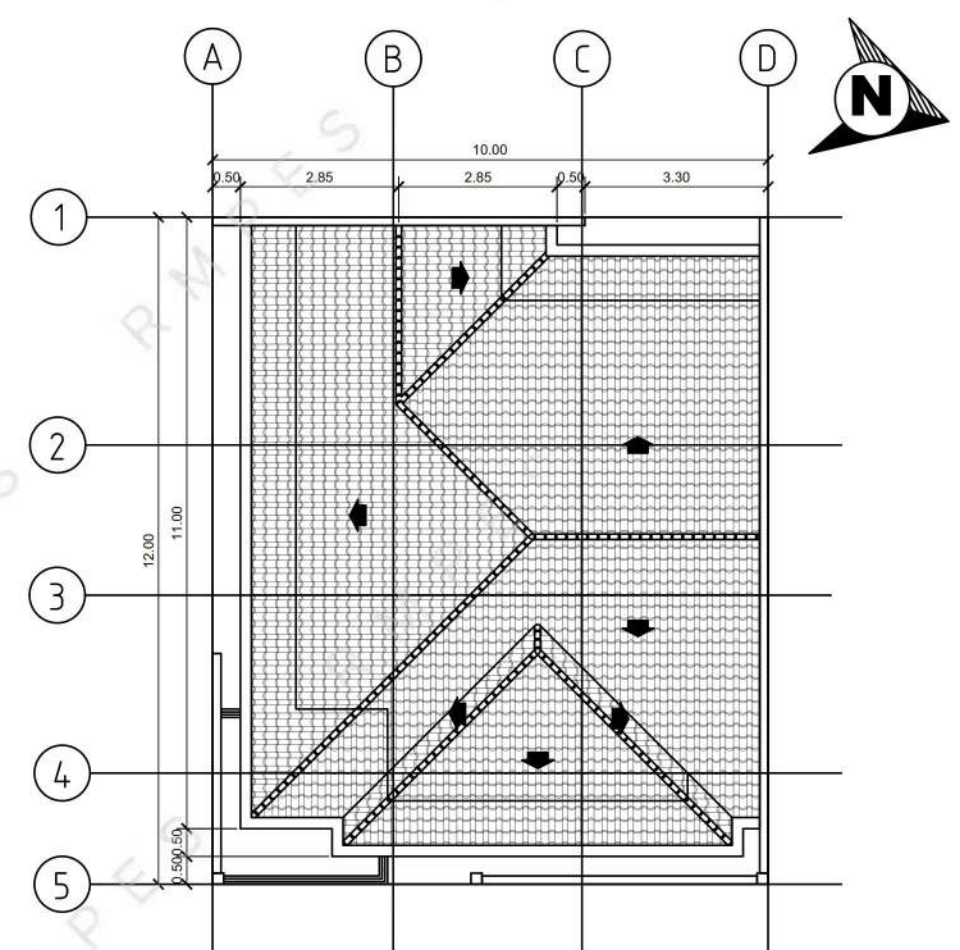

3 ROOF PLAN
A-2 SCALE 1:75M

SCHEDULE OF FLOOR FINISHES

MARK	LOCATION	DESCRIPTION
F-1	LIVING, DINING, MASTERS BROOM, BEDROOMS, KITCHEN	600mm x 600mm CERAMIC TILES
F-2	CAR PARK, DIRTY KITCHEN	PLAIN CEMENT GOOVE FINISH
F-3	MASTER'S TOILET, COMMON T&B	300mm x 300mm NON-SKID CERAMIC TILES
F-4	MAIN ENTRANCE	300mm x 300mm NON-SKID TEXTURED CERAMIC TILES
F-5	BEDROOM 1, BEDROOM 2, HALLWAY	400mm x 400mm CERAMIC TILES
F-6	BALCONY	400mm x 400mm NON-SKID CERAMIC TILES
F-7	STAIRS	SOLID WOOD PLANK

SCHEDULE OF CEILING FINISHES

MARK	LOCATION	DESCRIPTION
C-1	LIVING, DINING, MASTER'S BD ROOM, BEDROOMS, HALLWAY, MB TOILET, COMMON TOILET, KITCHEN	3.5MM FICEMBOARD ON METAL FURRING
C-2	ROOF CEILING EAVES	PVC SPANDREL

FLOOR FINISHES

	Description	Quantity	Unit
	0.3x0.3 Non-skid Ceramic Tiles	14.71	sq m
	0.3x0.3 Non-skid Textured Ceramic Tiles	2.52	sq m
	0.4x0.4 Ceramic Tiles	53.70	sq m
	0.4x0.4 Non-skid Ceramic Tiles	8.81	sq m
	0.6x0.6 Ceramic Tiles	50.66	sq m
	Plain Cement Groove Finish	41.63	sq m
	Solid Wood Plank	5.74	sq m

R.A. 545

NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.

PROJECT TITLE:

PROPOSED TWO STOREY RESIDENTIAL

PROJECT LOCATION:

ARCHITECT

PRC REG. No.

PTR No.

ISSUED

TIN No.

DATE:






PROJECT OWNER/S:

SHEET CONTENT:

-GROUND FLOOR PLAN
-SECOND FLOOR PLAN
-ROOF PLAN
-SCHEDULE OF FLOOR FINISHES
-SCHEDULE OF CEILING FINISHES



SHT. No.

A/2

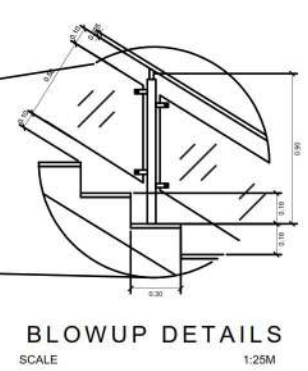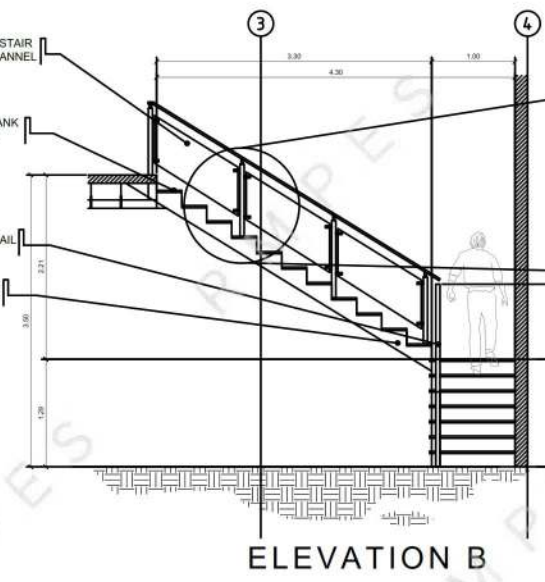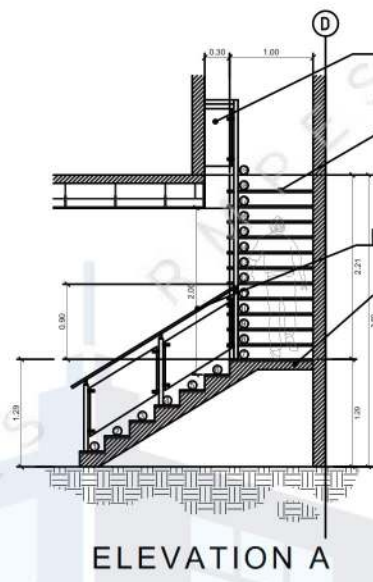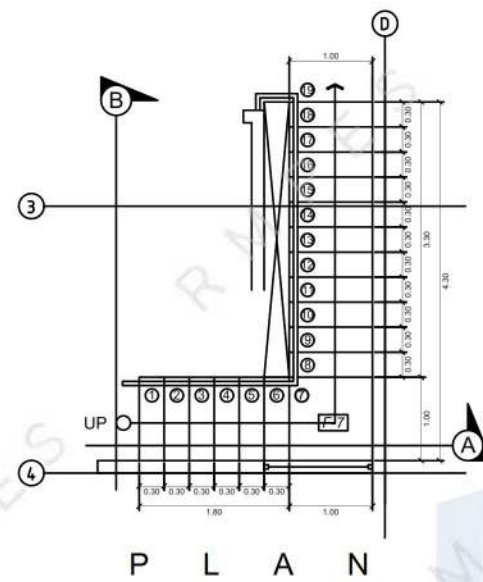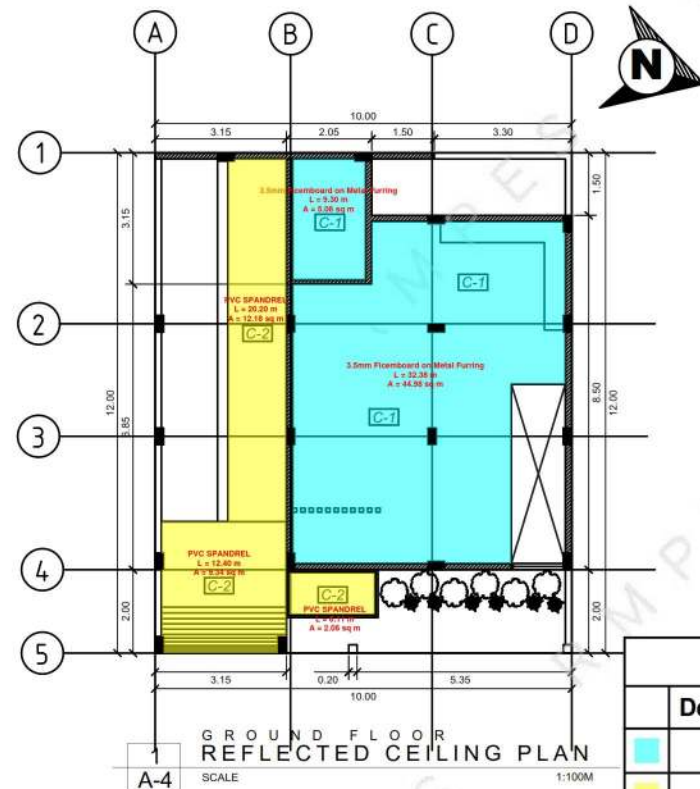

CEILING FINISHES				
Description	Label	Quantity	Unit	Length
C-1	3.5mm Ficemboard on Metal Furring	122.19	sq m	150.25
C-2	PVC SPANDREL	41.01	sq m	85.11



STAIR DETAILS
SCALE: 1:50M

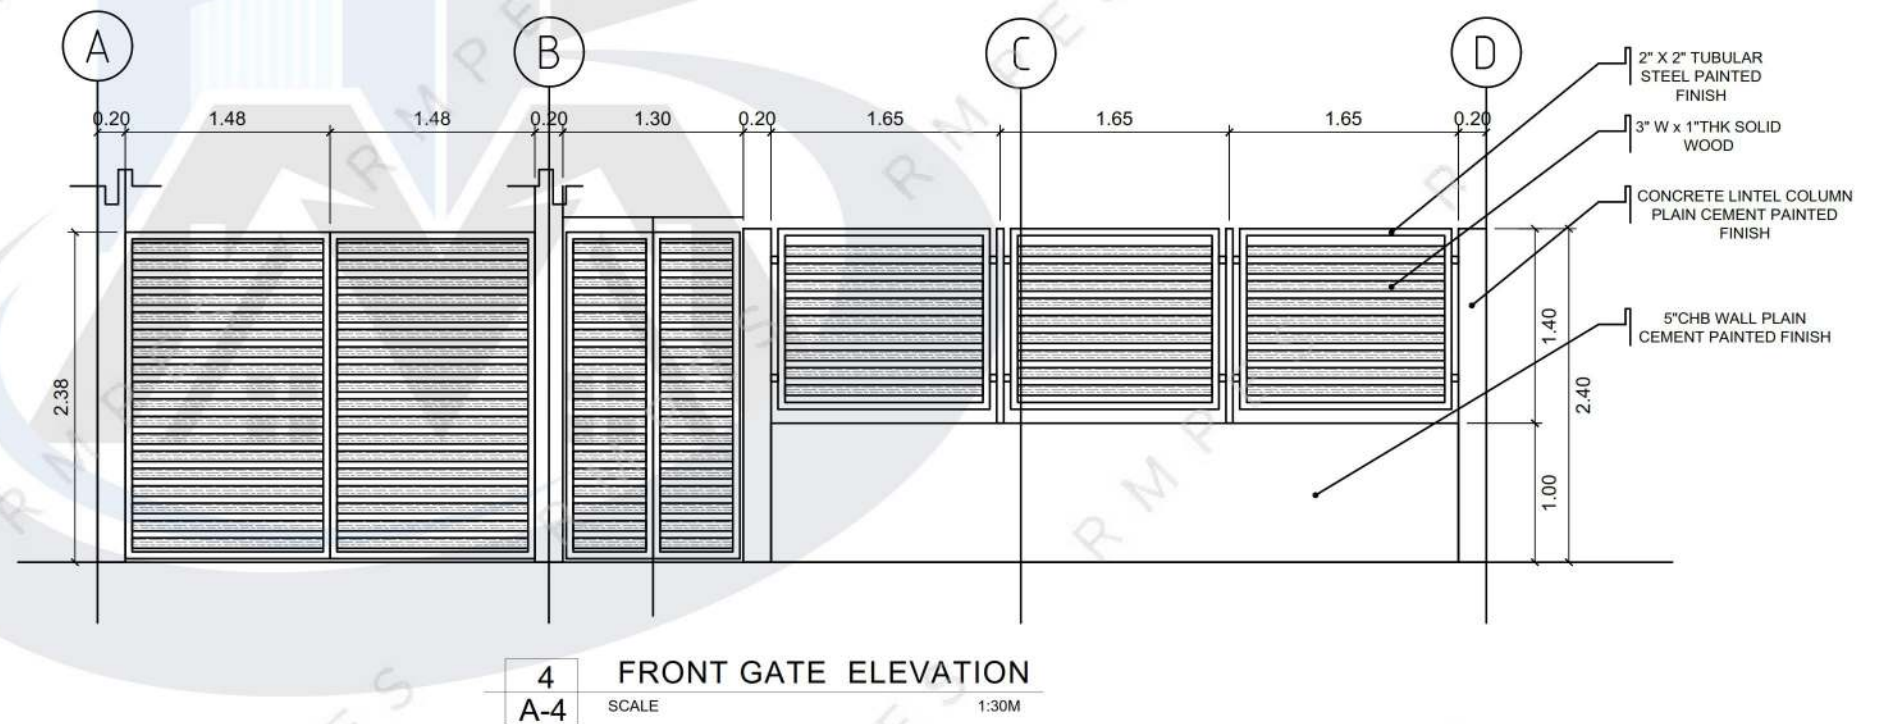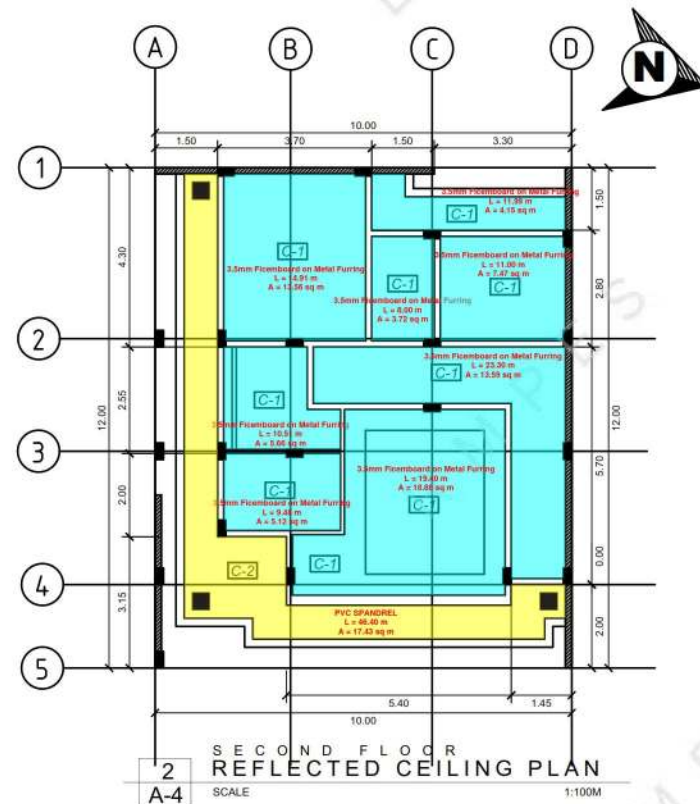

R.A. 545 NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROJECT TITLE:	PROJECT OWNER/S:		SHEET CONTENT:	SHT. No. A/4
	PROPOSED TWO STOREY RESIDENTIAL	ARCHITECT		-GROUND FLOOR REFLECTED CEILING PLAN -SECOND FLOOR REFLECTED CEILING PLAN -STAIR DETAILS -FRONT GATE ELEVATION	
	PROJECT LOCATION:	PRC REG. No.	DATE:		
		PTR No.			

GIRDER / BEAM SCHEDULE												
MARK	SIZE (mm)		BOTTOM BARS		TOP BARS				WEB BARS EACH FACE	STIRRUPS		REMARKS
	W	H	CONT. "A"	ADD'L. "B"	CONT. "C"	ADD'L. "DL"	ADD'L. "DR"	ADD'L. "E"		SIZE (mm)	SPACING FROM FACE OF SUPPORT OF SPAN (mm)	
FTB-1	200	300	2-Ø16	-	2-Ø16	-	-	-	-	-	1Ø50, 10Ø100, RESTØ200	
2B-1	200	400	2-Ø16	-	2-Ø16	1-Ø16	1-Ø16	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	
2B-2	150	300	2-Ø16	-	2-Ø16	-	-	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	
RB-1	150	300	2-Ø12	-	2-Ø12	-	-	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	

SLAB SCHEDULE														
MARK	THICK- NESS (mm)	SHORT SPAN						LONG SPAN						REMARKS
		BOTTOM BARS (mm)		TOP BARS (mm)				BOTTOM BARS (mm)		TOP BARS (mm)				
				CONTINUOUS EDGE		DISCONTINUOUS EDGE				CONTINUOUS EDGE		DISCONTINUOUS EDGE		
		Ø	S	Ø	S	Ø	S	Ø	S	Ø	S	Ø	S	
S-1	100	10	250	10	250	10	250	10	250	10	250	10	250	ONE WAY

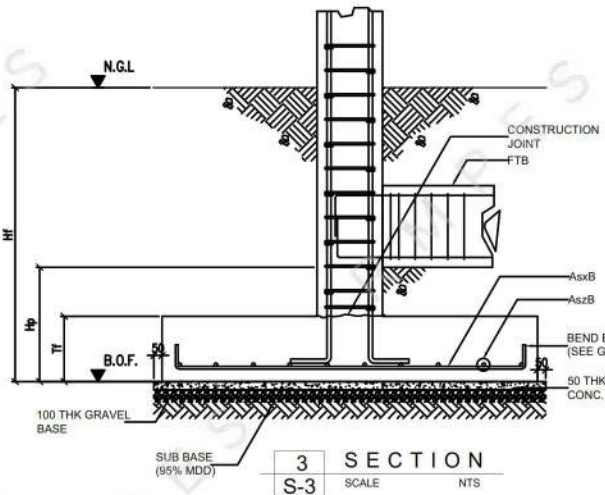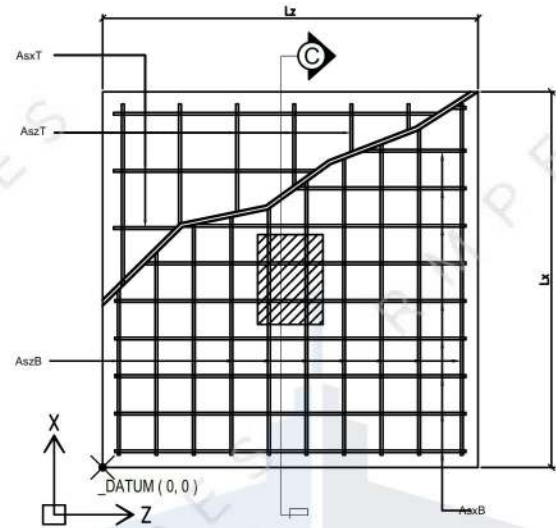


FOOTING MARK	FOOTING DIMENSION (mm)					REINFORCING BARS- SPACING			
	Lx (mm)	Lz (mm)	Hf (mm)	Hp (mm)	Tf (mm)	BOTTOM BARS	TOP BARS		
F-1	1100	1100	1400	500	300	#16-6 pcs	#16-6 pcs	-	-

**NOTE :
1) SEE FOUNDATION PLAN FOR LOCATION OF FOOTING
2) Hf - TO BE FINALIZED AFTER VERIFICATION OF ACTUAL SOIL CONDITION


7 TYPICAL FOOTING SCHEDULE
SCALE NTS

SITWORKS

	Description	Quantity	Unit
	BACKFILLING	72.82	cu m
	EXCAVATION	38.00	cu m
	GRAVEL BEDDING	9.70	cu m
	LEAN CONCRETE	1.89	cu m

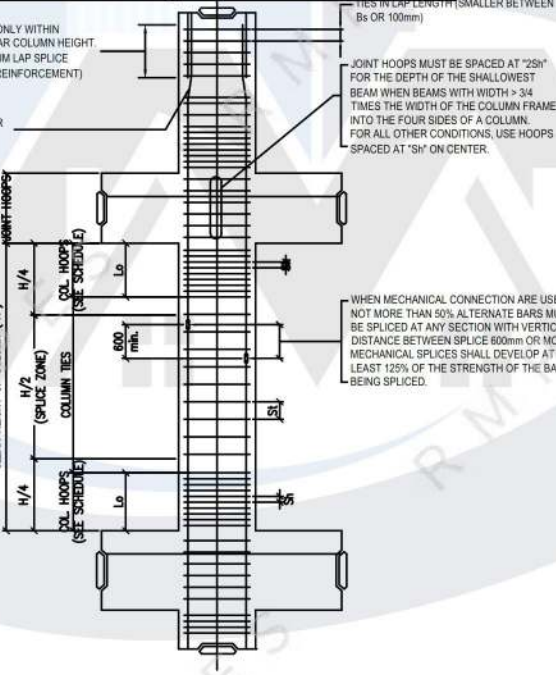

COLUMN SCHEDULE		
	C1	C2
ROOF LEVEL		
FOUNDATION LEVEL TO SECOND FLOOR LEVEL		

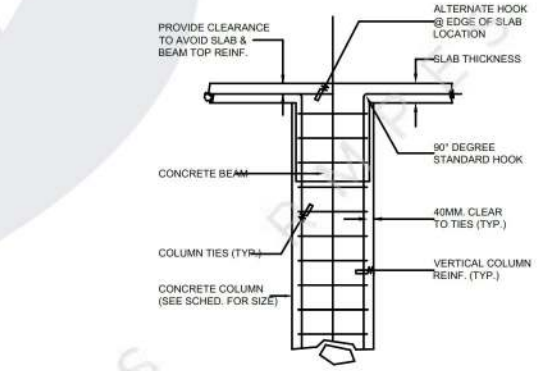

NOTES ON MECHANICAL COUPLERS:

- COUPLERS MUST BE LOCATED WITHIN THE MIDDLE HALF OF THE CLEAR HEIGHT OF THE COLUMN.
- SUBMIT TEST RESULTS OF COUPLERS FOR ENGINEERS' APPROVAL.
- AT LEAST 15% OF COUPLERS FOR EACH SIZE OF REBAR MUST BE TESTED FOR TENSILE STRENGTH TEST.

NOTES:


Sh = HOOP AND SUPPLEMENTARY CROSSTIE SPACING
NOT TO EXCEED 5s4 OR 100mm.
St = COLUMN TIE SPACING, NOT TO EXCEED 16th OF VERTICALS, C48th OF TIES, B4 OR 150mm, WHICHEVER IS LESSER.
Bs = SMALLER DIMENSION OF COLUMN CROSS SECTION.
Lo = LARGEST COLUMN DIMENSION, 1/2 OF CLEAR HEIGHT OR 450mm, WHICHEVER IS GREATER.
H = CLEAR HEIGHT OF COLUMN.

1 FOUNDATION PLAN
S-3 SCALE 1:75M

4 TYP. MOMENT FRAME CONCRETE COLUMN SPLICE DETAIL
S-3 SCALE NTS

6 TYPICAL GRAVITY TOP OF CONCRETE COLUMN DETAIL
S-3 SCALE NTS

	R.A. 545	PROJECT TITLE:			PROJECT OWNER/S:	SHEET CONTENT:	SHT. No.
	NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROPOSED TWO STOREY RESIDENTIAL	CIVIL ENGINEER			-BEAM/ORDER SCHEDULE -SLAB SCHEDULE -FOUNDATION PLAN -FOOTING DETAIL -TYP. MOMENT FRAME CONCRETE COLUMN SPLICE DETAIL -TYPICAL GRAVITY TOP OF CONCRETE COLUMN DETAIL	S/3
			PRC REG. No.				
			PTR No.	DATE:			
			ISSUED				
	PROJECT LOCATION:	TIN No.					

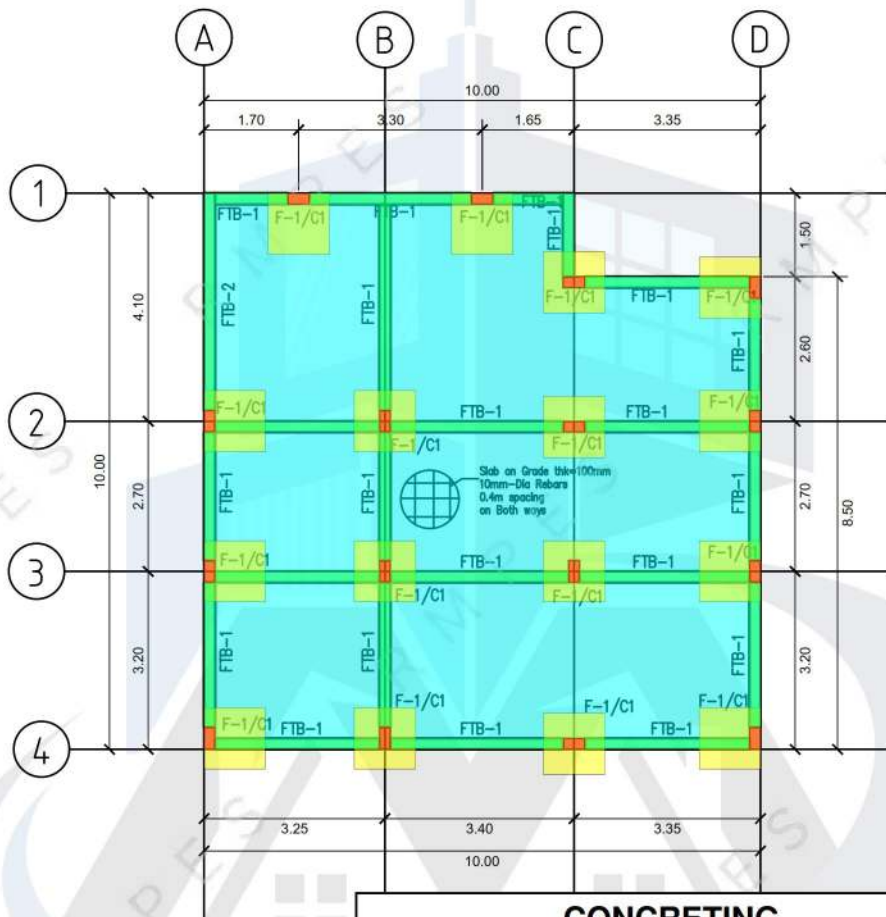


CONCRETING


1
S-3

F
SO

	Description	Label	Quantity	Unit
	COLUMN	C1	6.68	cu m
	FOOTING	F-1	5.71	cu m
	FOOTING TIE BEAM	FTB-1	3.51	cu m
	SLAB ON GRADE	SOG	9.35	cu m

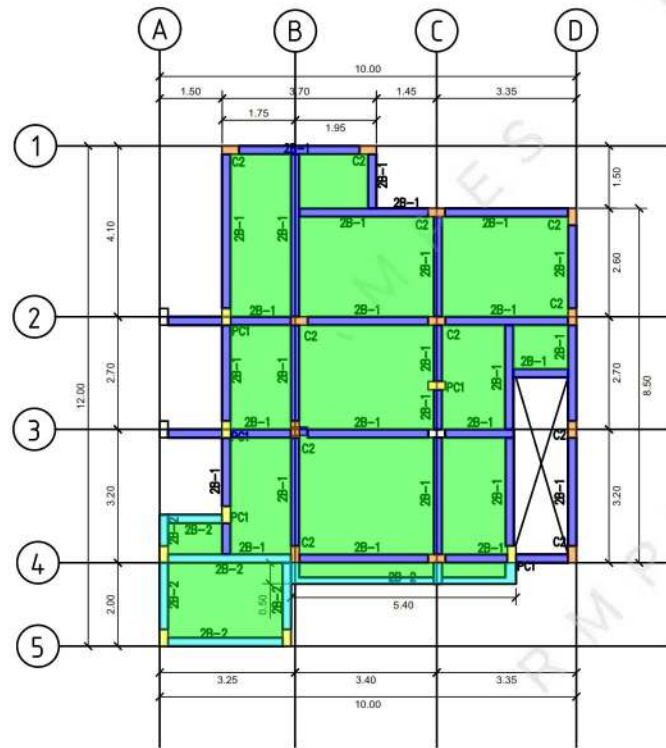


1 SECOND FLOOR PLAN
S-2 SCALE 1:100M

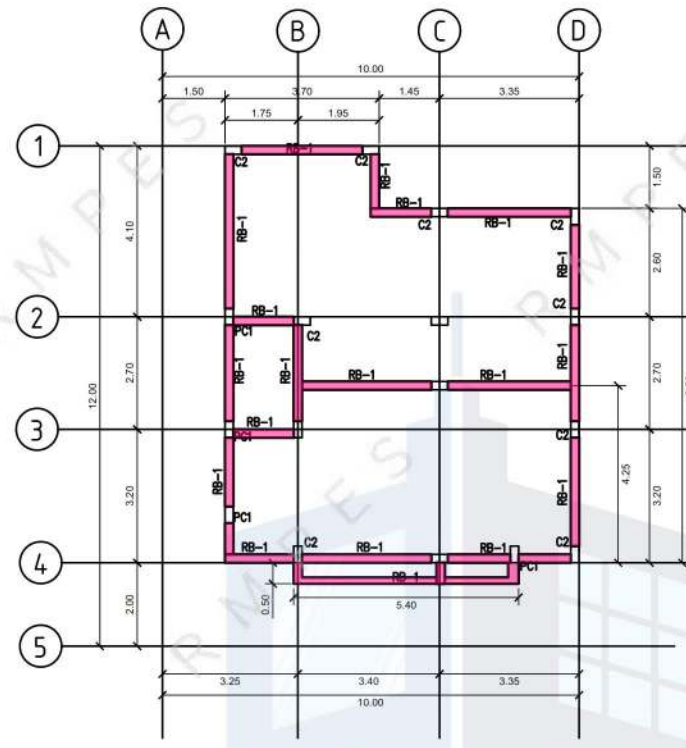


2 SECOND FLOOR ROOF BEAM PLAN
S-2 SCALE 1:100M

CONCRETING				
	Description	Label	Quantity	Unit
	COLUMN	C2 3.5 span	2.99	cu m
	COLUMN	PC1 3.5 span	1.25	cu m
	COLUMN	PC1 5.2 span	1.10	cu m
	ROOF BEAM	RB-1	2.65	cu m
	SUSPENDED BEAMS	2B-1	5.19	cu m
	SUSPENDED BEAMS	2B-2	0.90	cu m
	SUSPENDED SLABS	S-1	6.37	cu m


3 ROOF FRAMING PLAN
S-2 SCALE 1:100M

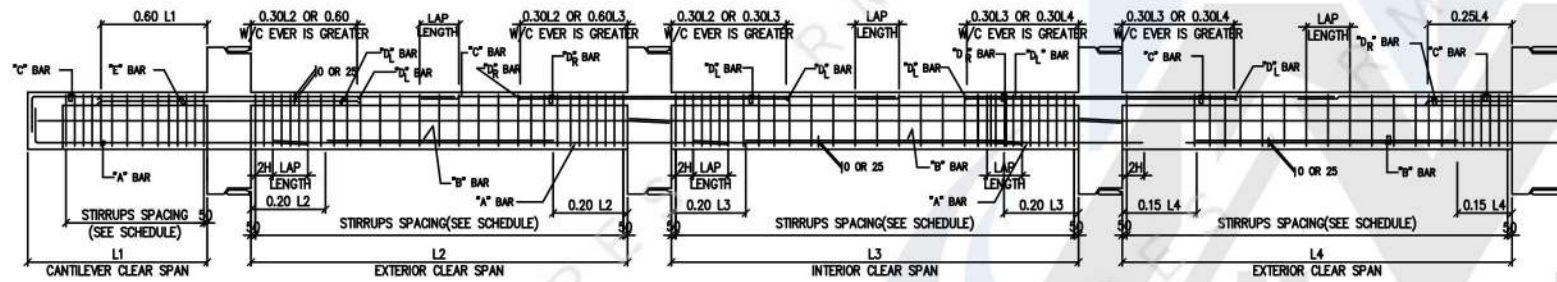


4 TYPICAL BEAM ELEVATION
S-4 SCALE NTS

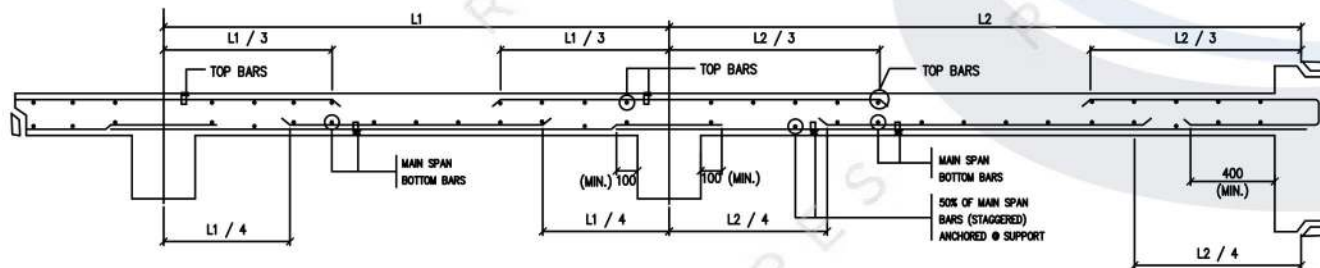

5 TYPICAL SLAB DETAIL
S-4 SCALE NTS

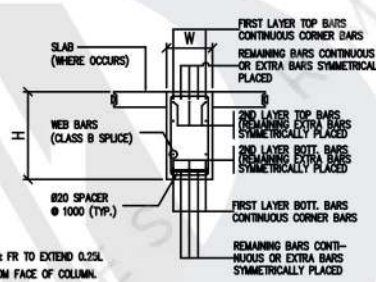


- NOTES:
1. BEAM / GIRDER MARKS SHOULD BE READ FROM LEFT TO RIGHT.
 2. THESE ADDITIONAL REBARS CAN BE PLACED AT LAYER NO.1, OR IF IT CANNOT BE ACCOMMODATED ALL AT 1ST LAYER, PLACE THE REMAINING ON THE NEXT LAYER.
 3. ADOPT BIGGER REINFORCEMENT WHERE CONFLICT OF TOP & BOTTOM BARS OCCURS @ COMMON EDGE OF TWO ADJACENT BEAMS / GIRDERS.

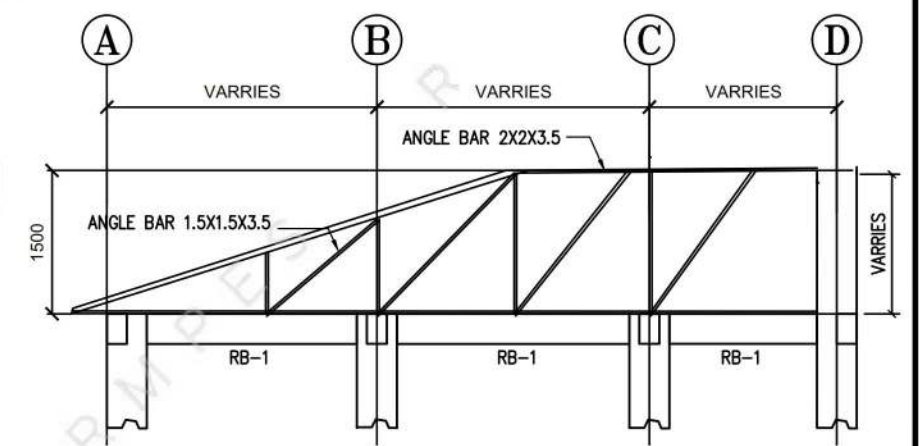

6 ROOF FRAMING SECTION
S-4 SCALE NTS

R.A. 545 NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROJECT TITLE:	PROJECT OWNER/S:		SHEET CONTENT:	SHT. No. S/4
	PROPOSED TWO STOREY RESIDENTIAL	CIVIL ENGINEER		-SECOND FLOOR FRAMING PLAN -SECOND FLOOR ROOF BEAM PLAN -ROOF FRAMING PLAN -TYPICAL BEAM ELEVATION -TYPICAL SLAB DETAIL	
	PROJECT LOCATION:	PRC REG. No.	PTR No.	ISSUED	
		TIN No.	DATE:		

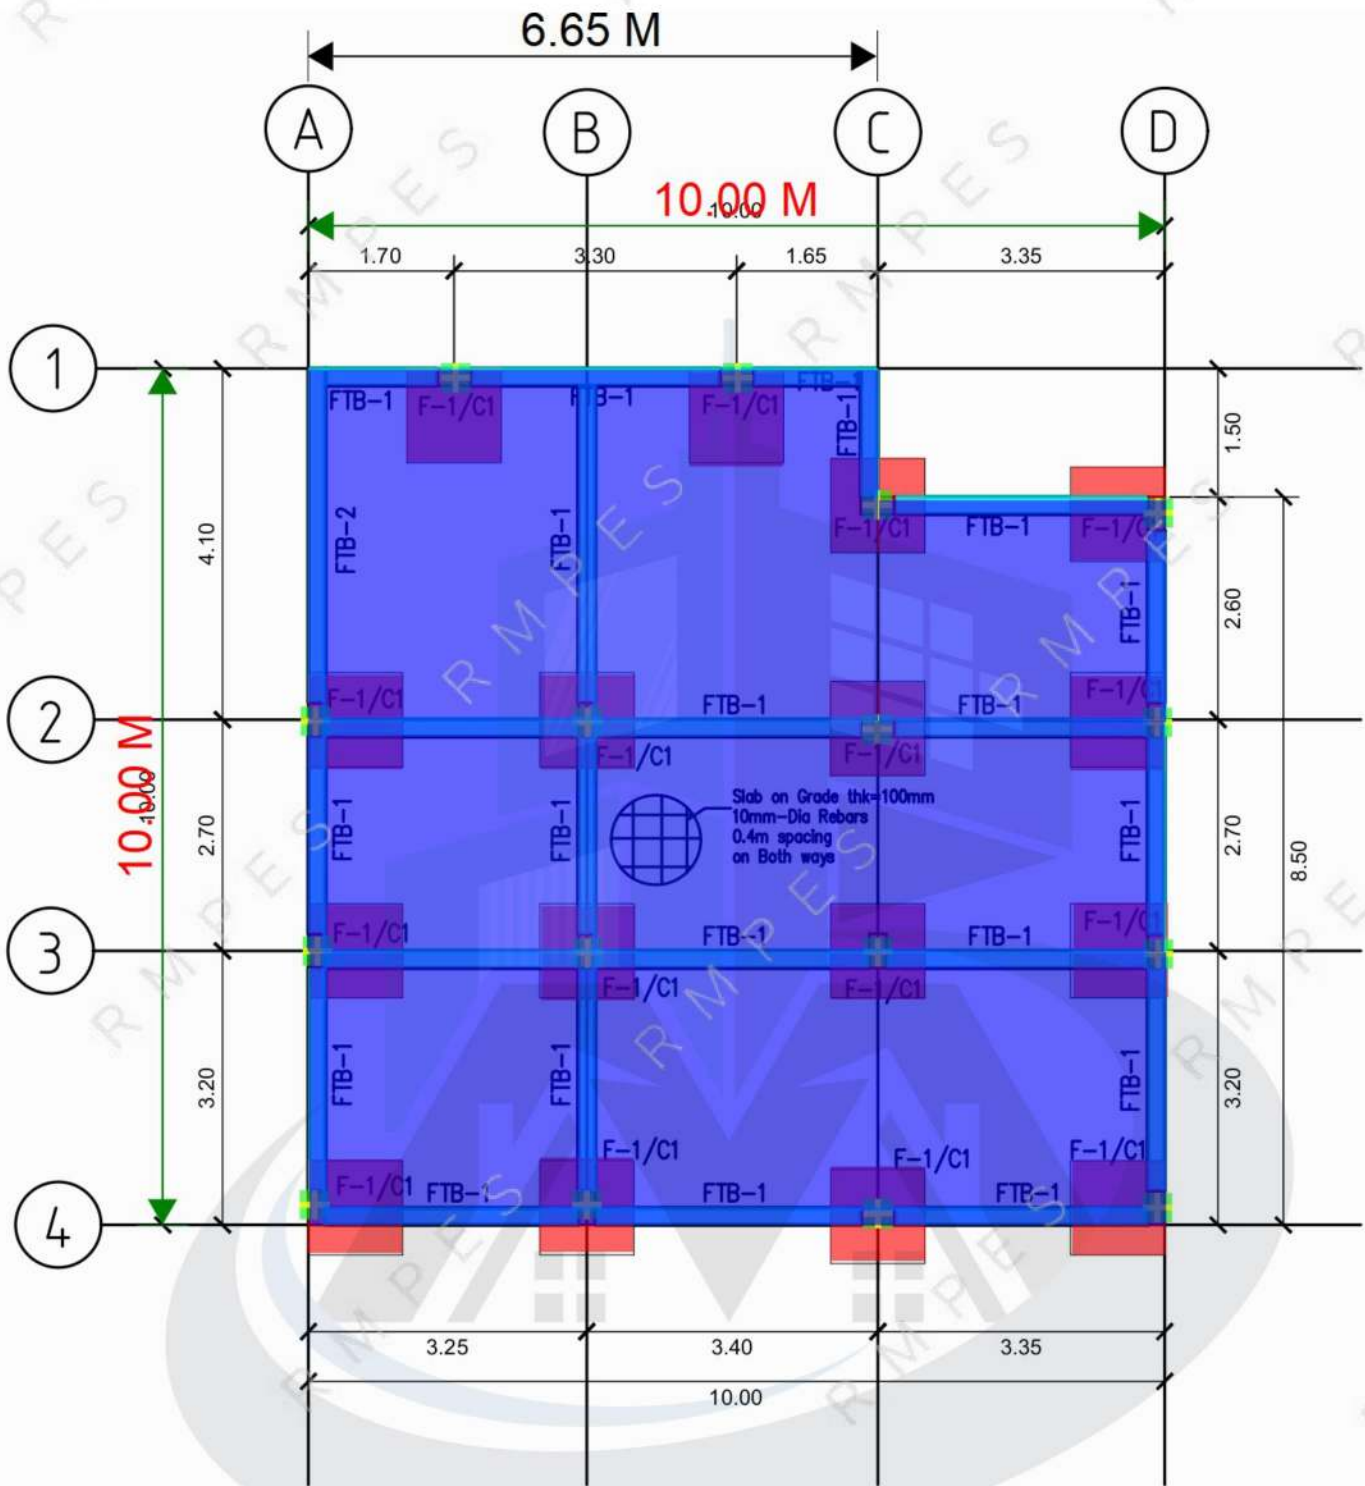


1
S-3

FOUNDATION PLAN


SCALE

1:75M

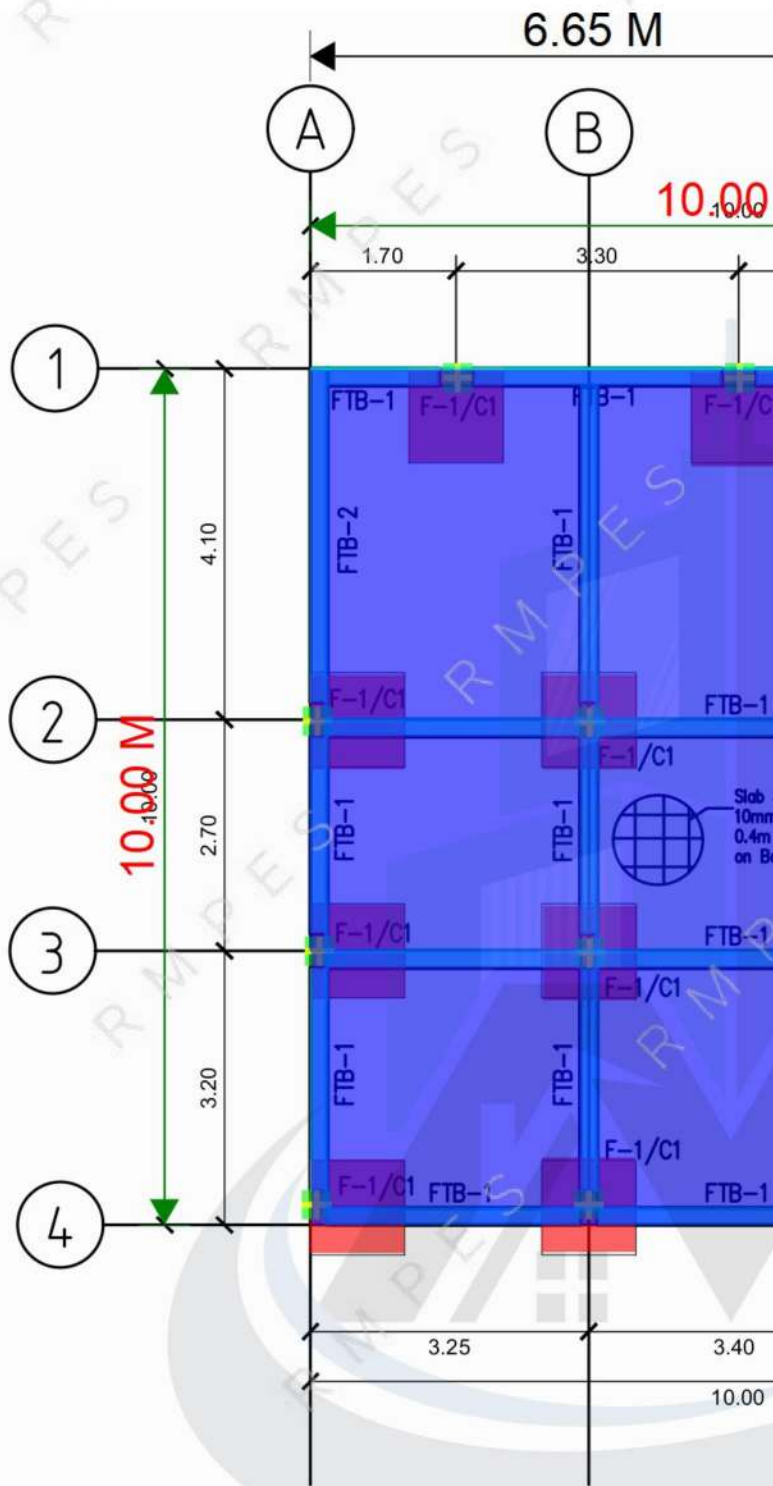

16mm F-1 Bot. Bar	245.8 M	
16mm C1 Vert. Bar	526.9 M	
10mm C1 Ties 1.1 Span	270.4 M	
10mm C1 Ties 4.1 Span	769.6 M	
16mm FTB-1 Main Bar	313.0 M	
10mm FTB-1 Stirrups 1A	30.0 M	
10mm FTB-1 Stirrups 1.1B	20.8 M	
10mm FTB-1 Stirrups 1.2B	21.2 M	
10mm FTB-1 Stirrups 1C	21.3 M	
10mm FTB-1 Stirrups 2A	21.9 M	
10mm FTB-1 Stirrups 2B	22.3 M	
10mm FTB-1 Stirrups 2C	21.9 M	
10mm FTB-1 Stirrups 3A	21.9 M	
10mm FTB-1 Stirrups 3B	22.3 M	
10mm FTB-1 Stirrups 3C	21.9 M	
10mm FTB-1 Stirrups 4A	21.9 M	
10mm FTB-1 Stirrups 4B	21.6 M	
10mm FTB-1 Stirrups 4C	21.9 M	
10mm FTB-1 Stirrups A2	18.5 M	
10mm FTB-1 Stirrups A3	20.0 M	
10mm FTB-1 Stirrups B1	24.6 M	
10mm FTB-1 Stirrups B2	19.2 M	
10mm FTB-1 Stirrups B3	19.9 M	
10mm FTB-1 Stirrups D1	17.7 M	
10mm FTB-1 Stirrups D2	19.1 M	
10mm FTB-1 Stirrups D3	20.0 M	
10mm SOG 1	152.4 M	
10mm SOG 2	52.1 M	
10mm SOG 3	148.8 M	
10mm SOG 4	171.8 M	

1 FOUNDATION PLAN
S-3 SCALE 1:75M

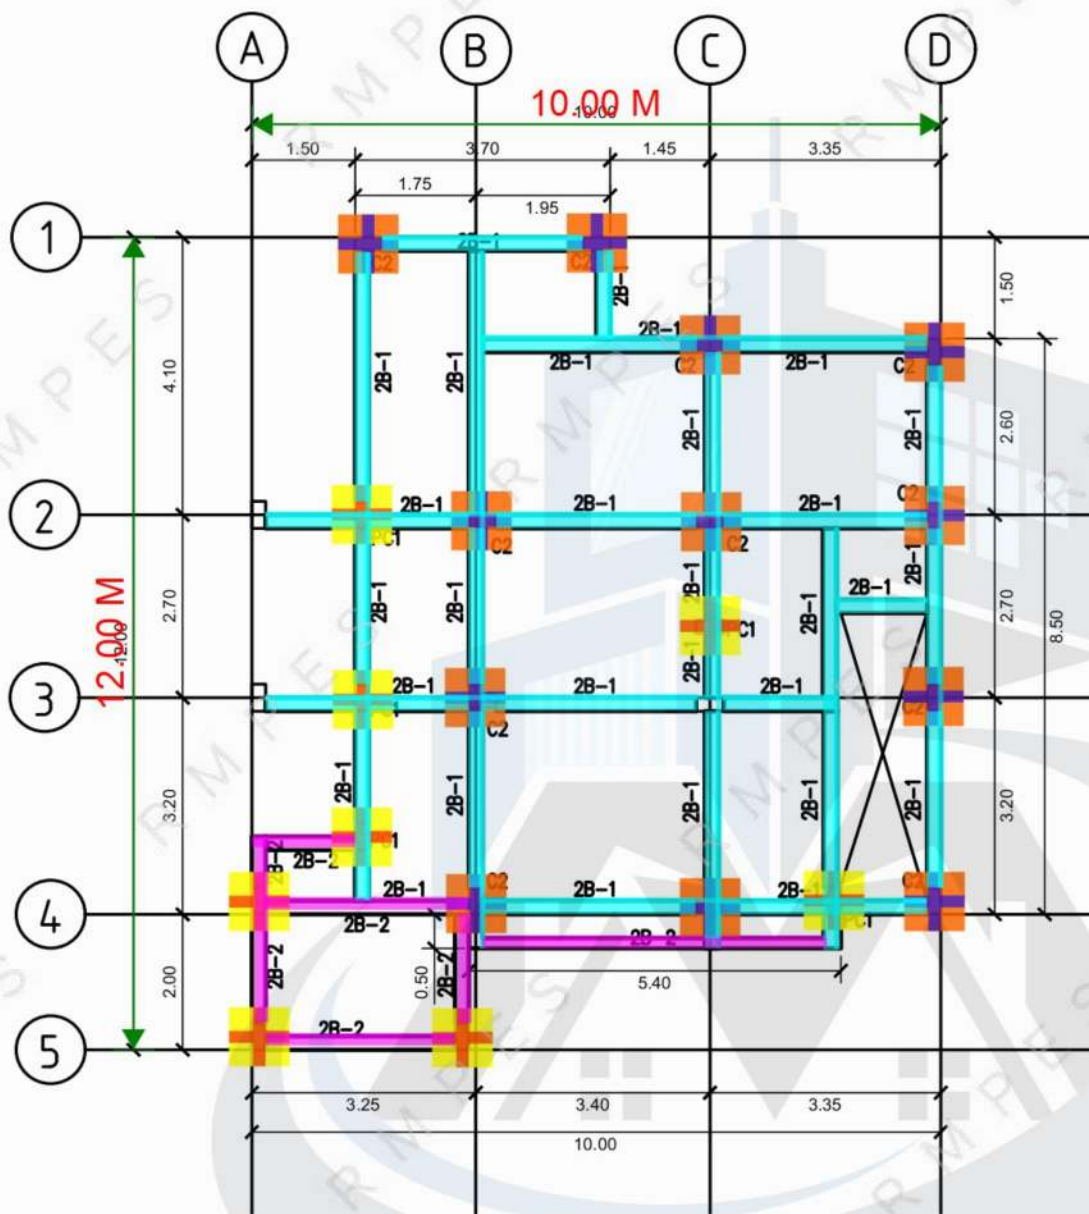



1
S-2


SECOND FLOOR PLAN

SCALE

1:100M

12mm PC1 Vert. Bar 1st	65.0 M
10mm PC1 Vert. Bar 5.2 Span	32.3 M
10mm PC1 Ties 5.2 Span	125.4 M
12mm PC1 Vert. Bar 3.5 span	74.3 M
10mm PC1 Vert. Bar 3.5 Span	36.8 M
10mm PC1 Ties 3.5 Span	156.8 M
12mm C2 Vert. Bar 3.5 span	178.3 M
10mm C2 Vert. Bar 3.5 Span	88.3 M
10mm C2 Ties 3.5 Span	376.2 M
16mm 2B-1 Main Bar	370.6 M
16mm 2B-2 Main Bar	82.1 M
16mm 2B-1 Extra Bar 1A	3.1 M
16mm 2B-1 Extra Bar 1B	3.3 M
16mm 2B-1 Extra Bar 1C	3.2 M
16mm 2B-1 Extra Bar 2A	3.2 M
16mm 2B-1 Extra Bar 2B	3.1 M
16mm 2B-1 Extra Bar 2C	3.2 M
16mm 2B-1 Extra Bar 3A	3.2 M
16mm 2B-1 Extra Bar 3B	3.3 M
16mm 2B-1 Extra Bar 3C	3.2 M
16mm 2B-1 Extra Bar 4B	3.3 M
16mm 2B-1 Extra Bar 4C	3.2 M
16mm 2B-1 Extra Bar A1	3.7 M
16mm 2B-1 Extra Bar A2	2.8 M
16mm 2B-1 Extra Bar A3	3.1 M
16mm 2B-1 Extra Bar B1	3.8 M
16mm 2B-1 Extra Bar B2	2.7 M
16mm 2B-1 Extra Bar B3	3.6 M
16mm 2B-1 Extra Bar B'1	2.1 M
16mm 2B-1 Extra Bar C1	2.8 M
16mm 2B-1 Extra Bar C2	2.9 M
16mm 2B-1 Extra Bar C3	3.6 M
16mm 2B-1 Extra Bar C'2	5.3 M
16mm 2B-1 Extra Bar D1	2.5 M
16mm 2B-1 Extra Bar D2	2.8 M
16mm 2B-1 Extra Bar D3	3.0 M
10mm 2B-1 Stirrups 1A	27.0 M
10mm 2B-1 Stirrups 1B	27.9 M
10mm 2B-1 Stirrups 1C	27.4 M
10mm 2B-1 Stirrups 2A	27.6 M
10mm 2B-1 Stirrups 2B	26.2 M
10mm 2B-1 Stirrups 2C	27.5 M
10mm 2B-1 Stirrups 3A	27.5 M
10mm 2B-1 Stirrups 3B	27.9 M
10mm 2B-1 Stirrups 3C	27.4 M
10mm 2B-1 Stirrups 4B	27.2 M
10mm 2B-1 Stirrups 4C	27.3 M
10mm 2B-1 Stirrups A1	30.1 M
10mm 2B-1 Stirrups A2	23.3 M
10mm 2B-1 Stirrups A3	26.3 M
10mm 2B-1 Stirrups B1	31.1 M
10mm 2B-1 Stirrups B2	24.1 M
10mm 2B-1 Stirrups B3	25.1 M
10mm 2B-1 Stirrups B'1	22.3 M
10mm 2B-1 Stirrups C1	24.3 M
10mm 2B-1 Stirrups C2	24.3 M
10mm 2B-1 Stirrups C3	29.1 M
10mm 2B-1 Stirrups C'2	42.5 M
10mm 2B-1 Stirrups D1	22.1 M
10mm 2B-1 Stirrups D2	23.3 M
10mm 2B-1 Stirrups D3	25.2 M
10mm 2B-2 Stirrups 4A	23.2 M
10mm 2B-2 Stirrups 4B	25.4 M
10mm 2B-2 Stirrups 5A	17.8 M
10mm 2B-2 Stirrups A3	17.8 M
10mm 2B-2 Stirrups B4	15.3 M

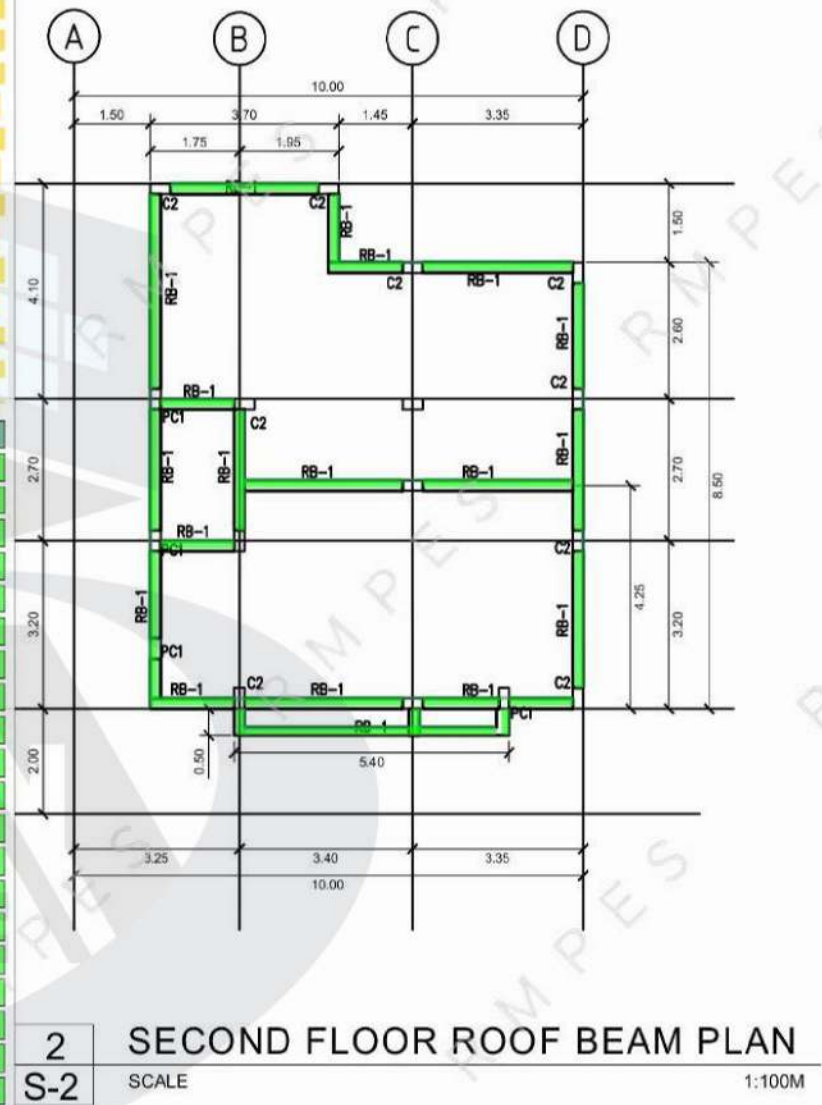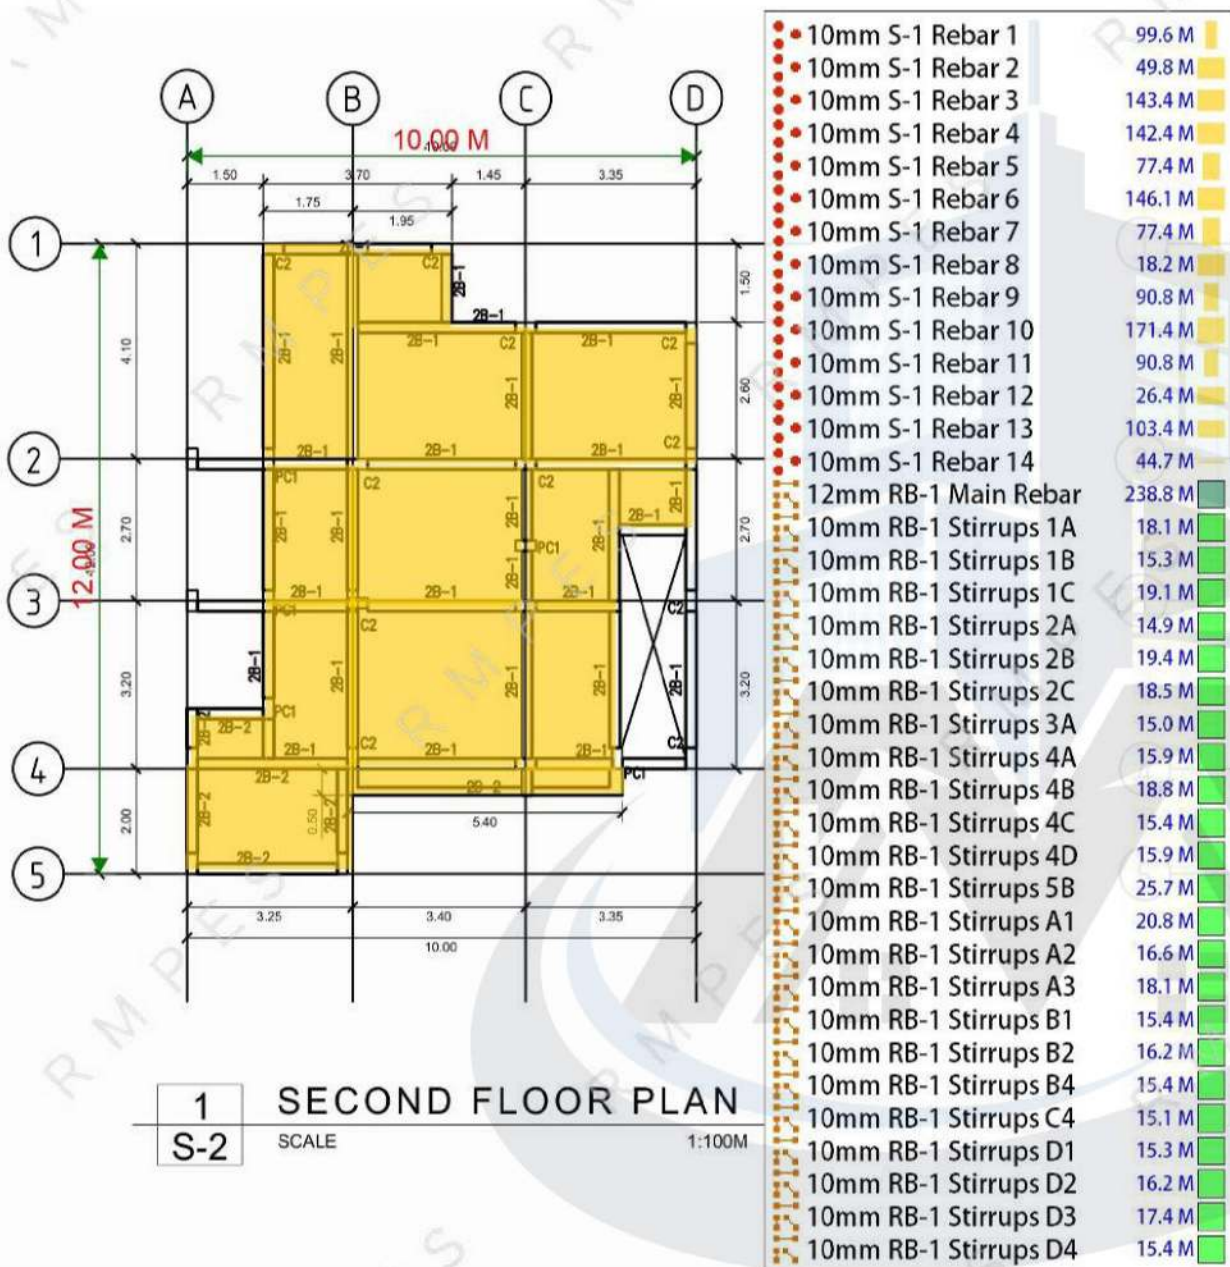

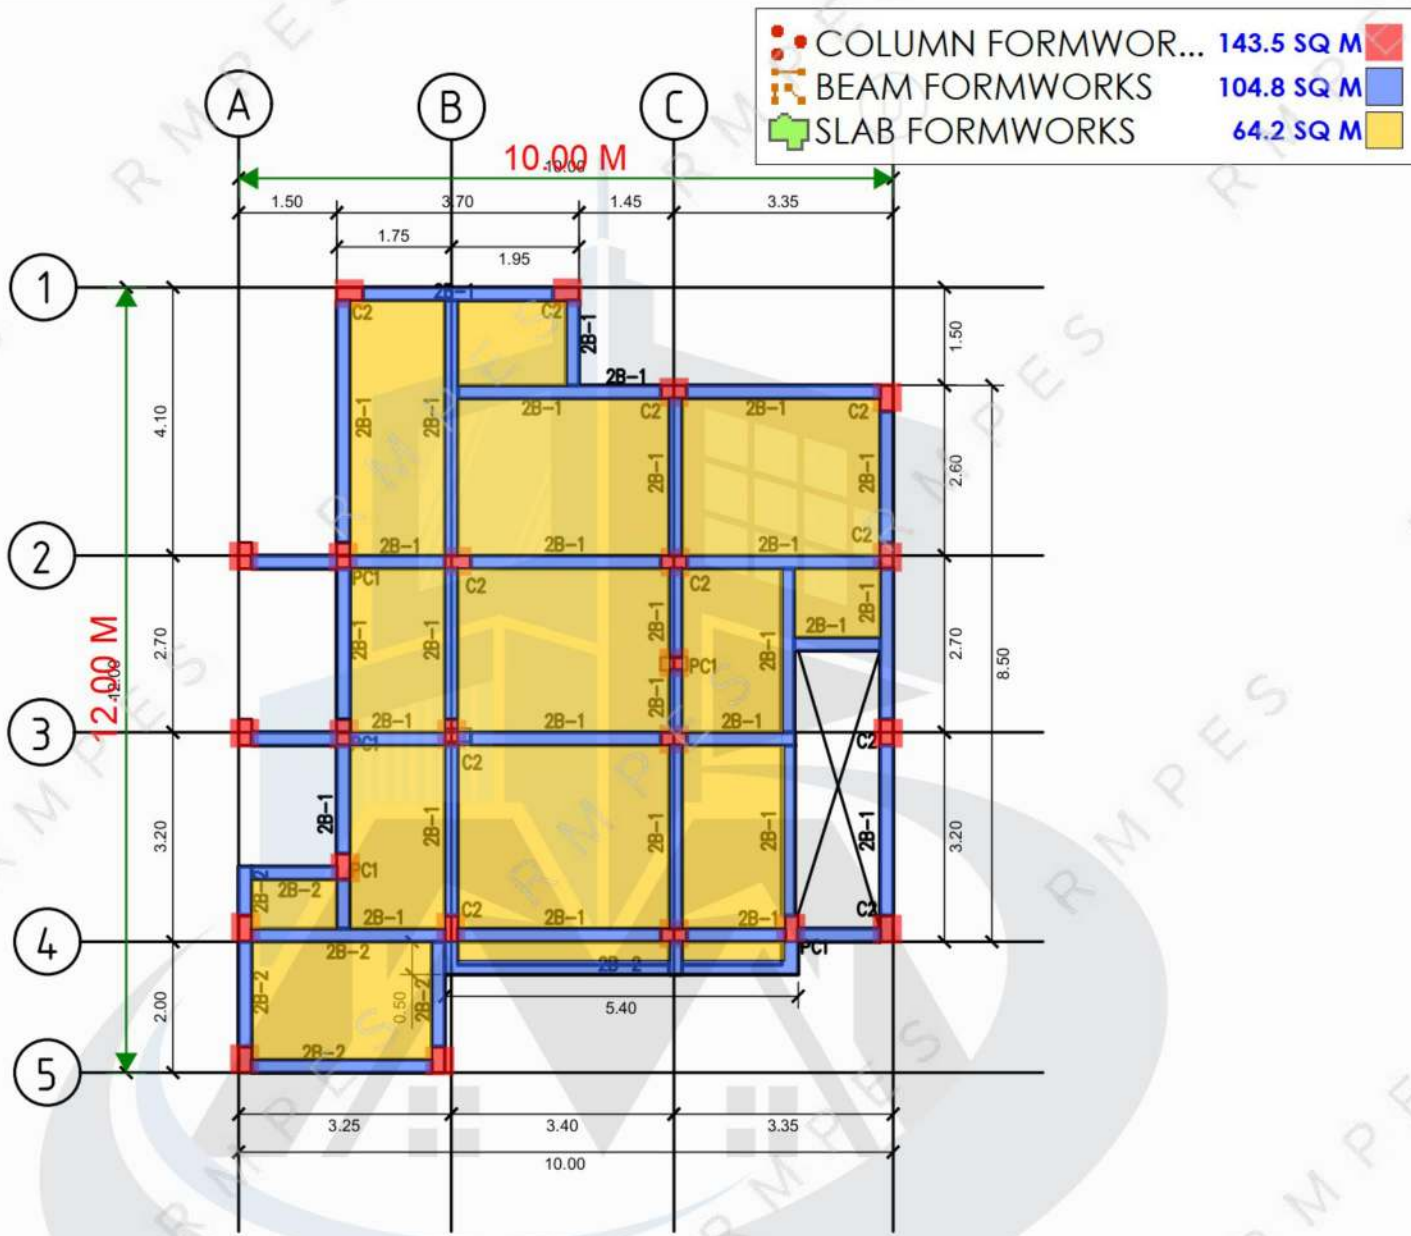

1
S-2

SECOND FLOOR PLAN

SCALE 1:100M