



RMP ENGINEERING SERVICES

Address: #391 Brgy. Rizal, San Leonardo, Nueva Ecija, 3102

Email: Pangilinan.ronmarb@gmail.com | Contact: +63960-244-6185

BILL OF MATERIALS

PROPOSED TWO-STOREY RESIDENTIAL



Perspective View of the Proposed Two-Storey Residential

PROJECT LOCATION:	_____
OWNER:	_____
PROJECT CODE:	RMP-2026-003
TOTAL FLOOR AREA:	198.04 SQ.M
ITEM SUMMARY:	Siteworks Concrete Works Reinforcement Works Formworks Ceiling Works Tile Works

PREPARED BY:

ENGR. RON MAR B. PANGILINAN, RCE

PRC NO. : _____
VALIDITY : _____
PTR NO. : _____
ISSUED ON : _____
ISSUED AT : _____
TIN NO. : _____



RMP ENGINEERING SERVICES

Address: #391 Bgry. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com, Contact: +63960-244-6185

Date:

Project: PROPOSED TWO STOREY RESIDENTIAL

Location:

Owner:

Floor Area: 198.04 sq.m

Lot Area: sq.m

BILL OF MATERIALS

Item No.	Item Description	Quantity	Unit	Unit Price, Php	Amount, Php
I.	SITEWORKS				
	• Mobilization/Demobilization/Site Clearing	1.00	lot	45,000.00	45,000.00
	• Excavation Works	45.60	cu.m	350.00	15,960.00
	• Backfilling Works	87.38	cu.m	250.00	21,846.00
	• Lot Relocation	1.00	lot	8,000.00	8,000.00
	• Staking Out/Layout	1.00	lot	2,500.00	2,500.00
	• Soil Poisoning	110.00	sq.m	180.00	19,800.00
	• Gravel Bed	11.64	cu.m	1,000.00	11,640.00
				Sub Total =	124,746.00
				Labor Cost =	49,898.40
II.	CIVIL/STRUCTURAL WORKS				
III.I.	CONCRETING/REINFORCEMENTS				
	Lean Concrete (2500 PSI)	1.89	cu.m		
	• Cement	12.00	bgs	250.00	3,000.00
	• Sand	1.00	cu.m	1,000.00	1,000.00
	• Gravel 3/4"	2.00	cu.m	1,450.00	2,900.00
	RC Footings (4000 PSI)	6.00	cu.m		
	• Cement	72.00	bgs	250.00	18,000.00
	• Sand	3.00	cu.m	1,000.00	3,000.00
	• Gravel 3/4"	6.00	cu.m	1,450.00	8,700.00
	• 16 mmø def bar (6 meters)	45.00	pcs	480.00	21,600.00
	• GI Tie Wire # 16	5.00	kgs	85.00	425.00
	RC Columns (4000 PSI)	12.62	cu.m		
	• Cement	152.00	bgs	250.00	38,000.00
	• Sand	7.00	cu.m	1,000.00	7,000.00
	• Gravel 3/4"	13.00	cu.m	1,450.00	18,850.00
	• 16 mmø def bar (6 meters)	95.00	pcs	480.00	45,600.00
	• 12 mmø def bar (6 meters)	58.00	pcs	290.00	16,820.00
	• 10 mmø def bar (6 meters)	335.00	pcs	230.00	77,050.00
	• GI Tie Wire # 16	25.00	kgs	85.00	2,125.00
	Footings Tie Beams (4000 PSI)	3.69	cu.m		
	• Cement	45.00	bgs	250.00	11,250.00
	• Sand	2.00	cu.m	1,000.00	2,000.00
	• Gravel 3/4"	4.00	cu.m	1,450.00	5,800.00
	• 16 mmø def bar (6 meters)	57.00	pcs	480.00	27,360.00
	• 10 mmø def bar (6 meters)	81.00	pcs	230.00	18,630.00
	• GI Tie Wire # 16	9.00	kgs	85.00	765.00
	Slab on Grade (3500 PSI)	9.82	cu.m		
	• Cement	89.00	bgs	250.00	22,250.00
	• Sand	5.00	cu.m	1,000.00	5,000.00
	• Gravel 3/4"	10.00	cu.m	1,450.00	14,500.00
	• 10 mmø def bar (6 meters)	95.00	pcs	230.00	21,850.00
	• GI Tie Wire # 16	4.00	kgs	85.00	340.00
	Suspended Beams (4000 PSI)	6.38	cu.m		
	• Cement	77.00	bgs	250.00	19,250.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00
	• 16 mmø def bar (6 meters)	96.00	pcs	480.00	46,080.00
	• 10 mmø def bar (6 meters)	140.00	pcs	230.00	32,200.00
	• GI Tie Wire # 16	15.00	kgs	85.00	1,275.00
	Roof Beams (4000 PSI)	2.78	cu.m		
	• Cement	34.00	bgs	250.00	8,500.00
	• Sand	2.00	cu.m	1,000.00	2,000.00
	• Gravel 3/4"	3.00	cu.m	1,450.00	4,350.00
	• 12 mmø def bar (6 meters)	43.00	pcs	290.00	12,470.00
	• 10 mmø def bar (6 meters)	71.00	pcs	230.00	16,330.00
	• GI Tie Wire # 16	7.00	kgs	85.00	595.00
	Suspended Slab (4000 PSI)	6.69	cu.m		
	• Cement	81.00	bgs	250.00	20,250.00
	• Sand	4.00	cu.m	1,000.00	4,000.00
	• Gravel 3/4"	7.00	cu.m	1,450.00	10,150.00

	• 10 mmø def bar (6 meters)	231.00	pcs	230.00	53,130.00
	• Gl Tie Wire # 16	9.00	kgs	85.00	765.00
				Sub Total =	639,310.00
				Labor Cost =	255,724.00
III.ii.	FORMWORKS	261.91	sqm		
	• Phenolic Board (4 x 8 x 1/2)	128.00	pcs	700.00	89,600.00
	• CWN Assorted Nail	200.00	kgs	80.00	16,000.00
	• Lumber for formworks (2" x 3" and 2" x 2")	8872.00	bd.ft	60.00	532,320.00
	• Standard H-Frame Set (1.2 x 1.7)	4.00	set	450.00	3,600.00
	• Platforms/Catwalk	8.00	pcs	350.00	5,600.00
	• Consumables/miscellaneous	1.00	lot	10%	64,712.00
				Sub Total =	711,832.00
				Labor Cost =	284,732.80
IV.	ARCHITECTURAL WORKS				
IV.i	CEILING WORKS	163.2	sqm		
	• Metal Furring (JEAMaxx G.24)	70.00	pcs	130.00	9,100.00
	• Carrying Channel (JEAMaxx G.24)	37.00	pcs	140.00	5,180.00
	• Double U-Clip (JEAMaxx)	242.00	pcs	5.00	1,210.00
	• Wall Angle (JEAMaxx G.24)	109.00	pcs	80.00	8,720.00
	• Blind rivets 1/8" dia. X 1/2" (1000 PCS PER BOX)	3.00	boxes	450.00	1,350.00
	• 3.5mm Thk. Ficem Board	48.00	pcs	630.00	30,240.00
	• PVC Spandrel (0.25x0.8)	206.00	pcs	150.00	30,900.00
	• Mesh Tape	6.00	pcs	120.00	720.00
	• black screw	1690.00	pcs	1.00	1,690.00
	• Consumables/miscellaneous	1.00	lot	10%	8,911.00
				Sub Total =	98,021.00
				Labor Cost =	39,208.40
IV.iii	TILE WORKS (Supply and installation of wall and floor tiles)	177.77	sqm		
	• 0.3x0.3 Non-skid Ceramic Tiles	184.00	pcs	180.00	33,120.00
	• 0.3x0.3 Non-skid Textured Ceramic Tiles	32.00	pcs	65.00	2,080.00
	• 0.4x0.4 Ceramic Tiles	376.00	pcs	75.00	28,200.00
	• 0.4x0.4 Non-skid Ceramic Tiles	62.00	pcs	80.00	4,960.00
	• 0.6x0.6 Ceramic Tiles	421.00	pcs	65.00	27,365.00
	• Solid Wood Plank	5.74	sqm	4,000.00	22,960.00
	• Consumables/miscellaneous	1.00	lot	10%	11,868.50
				Sub Total =	130,553.50
				Labor Cost =	52,221.40

MATERIAL COST:	1,704,462.50
LABOR COST:	681,785.00
TOTAL DIRECT COST:	2,386,247.50
Miscellaneous and Contingency:	238,624.75
Project Supervision/Overhead Cost:	190,899.80
VAT and Taxes:	286,349.70
TOTAL INDIRECT COST:	715,874.25

TOTAL PROJECT COST:	₱3,102,121.75
TOTAL AMOUNT IN WORDS:	THREE MILLION ONE HUNDRED TWO THOUSAND ONE HUNDRED TWENTY-ONE PESOS AND SEVENTY-FIVE CENTAVOS ONLY

EXCLUSION:

- General Requirements – Building permits, fees, and temporary facilities
- Masonry, Staircase, and Plastering Works
- Doors, Glazing, and Painting Works
- Plumbing and Sanitary Works – Drainage, water lines, fixtures, and septic tank
- Furniture and Appliances
- Bookshelves, Modular Countertops, and Kitchen Overhead Cabinets
- Air-Conditioning Units and Equipment
- Landscaping Works
- Perimeter Concrete Fence, Pedestrian Gate, and Main Driveway Gate
- Tinsmithing and Roofing Works
- Metal Works, Railings, and Metal Gates
- Woodworks and Cabinetry
- Electrical Works – Wiring, Conduits, Panel Board, and Service Entrance

PREPARED BY:

ENGR. RON MAR B. PANGILIINAN, RCE
RMP Engineering Services

APPROVED/ACKNOWLEDGE BY:

NAME
OWNER




RMP ENGINEERING SERVICES


Address: #391 Bgry. Rizal, San Leonardo, Nueva Ecija, 3102
Email: Pangilinan.ronmarb@gmail.com, Contact: +63960-244-6185

CONSTRUCTION QUANTITY TAKE-OFF


Name	Description	Qty	Units
SITEWORKS			
TOTAL EXCAVATION		38	CU M
TOTAL GRAVEL BEDDING		9.7	CU M
TOTAL BACKFILLING		72.82	CU M
CONCRETING			
Lean Concrete		1.89	CU M
Footing Concrete		5.71	CU M
FTB Concrete		3.51	CU M
SOG Concrete		9.35	CU M
Column Concrete		12.02	CU M
Suspended Beam Concrete		6.08	CU M
S-1 Concrete		6.37	CU M
RB-1 Concrete		2.65	CU M
REBAR			
FOOTING			
16mm Dia. Footing Rebar		245.76	M
COLUMN			
16mm Column Rebar		526.88	M
12mm Column Rebar		317.6	M
10mm Column Rebar		1855.75	M
FTB-1			
16mm FTB-1 Rebar		313.1	M
10mm FTB-1 Rebar		448.14	M
SOG			
10mm SOG Rebar		525.12	M
SUSPENDED BEAMS			
16mm Suspended Beams		532.85	M
10mm Suspended Beams		773.68	M
SUSPENDED SLABS			
10mm S-1 Rebar		1281.43	M
ROOF BEAMS			
12mm RB-1 Main Rebar		238.76	M
10mm Roof Beam Rebar		393.96	M
FORMWORKS			
TOTAL HEIGHT		92	M
COLUMN FORMWORKS		110.4	SQ M
TOTAL LENGTH		87.28	M
SUSPENDED BEAM FORMWORKS		87.28	SQ M
SLAB FORMWORKS		64.23	SQ M
CEILING WORKS			
TOTAL PERIMETER		235.36	M
3.5mm THK Ficem Board		122.19	SQ M
PVC SPANDREL		41.01	SQ M
TILE WORKS			
0.3x0.3 Non-skid Ceramic Tiles		14.71	SQ M
0.3x0.3 Non-skid Textured Ceramic Tiles		2.52	SQ M
0.4x0.4 Ceramic Tiles		53.7	SQ M
0.4x0.4 Non-skid Ceramic Tiles		8.81	SQ M
0.6x0.6 Ceramic Tiles		50.66	SQ M
Plain Cement Groove Finish		41.63	SQ M
Solid Wood Plank		5.74	SQ M

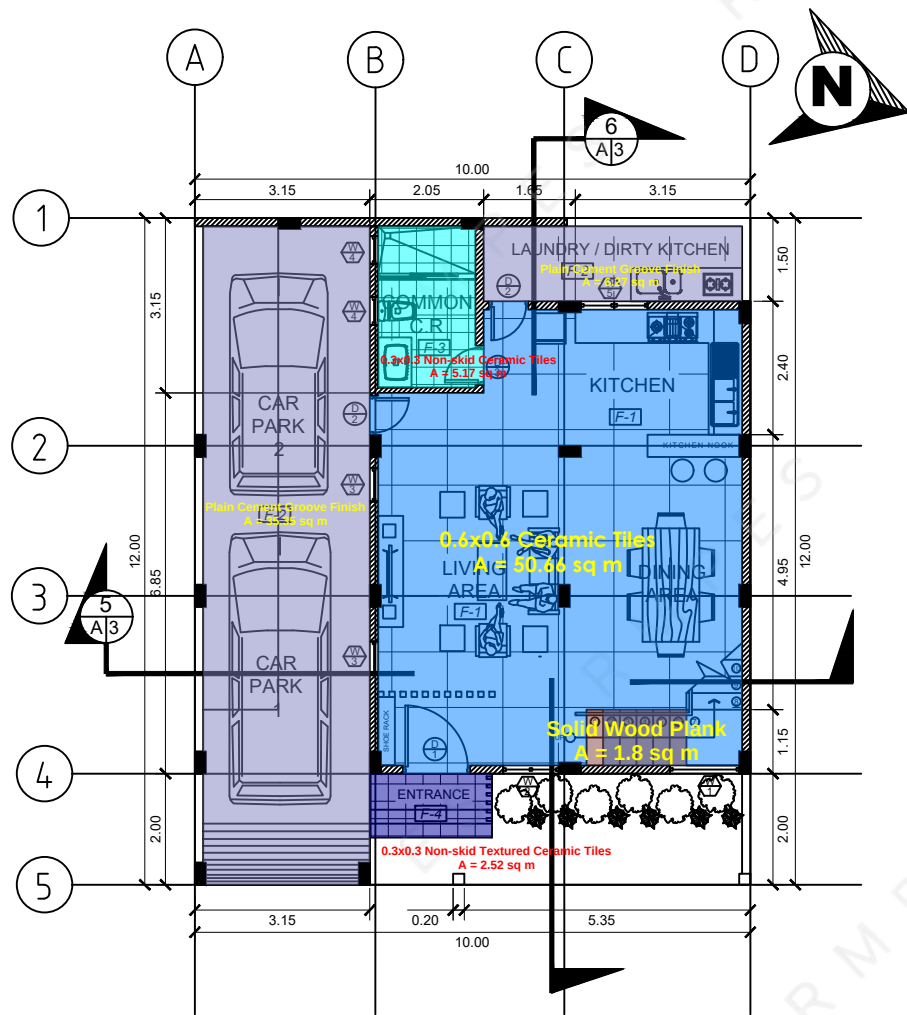

1
A-2
GROUND FLOOR PLAN
SCALE 1:75M

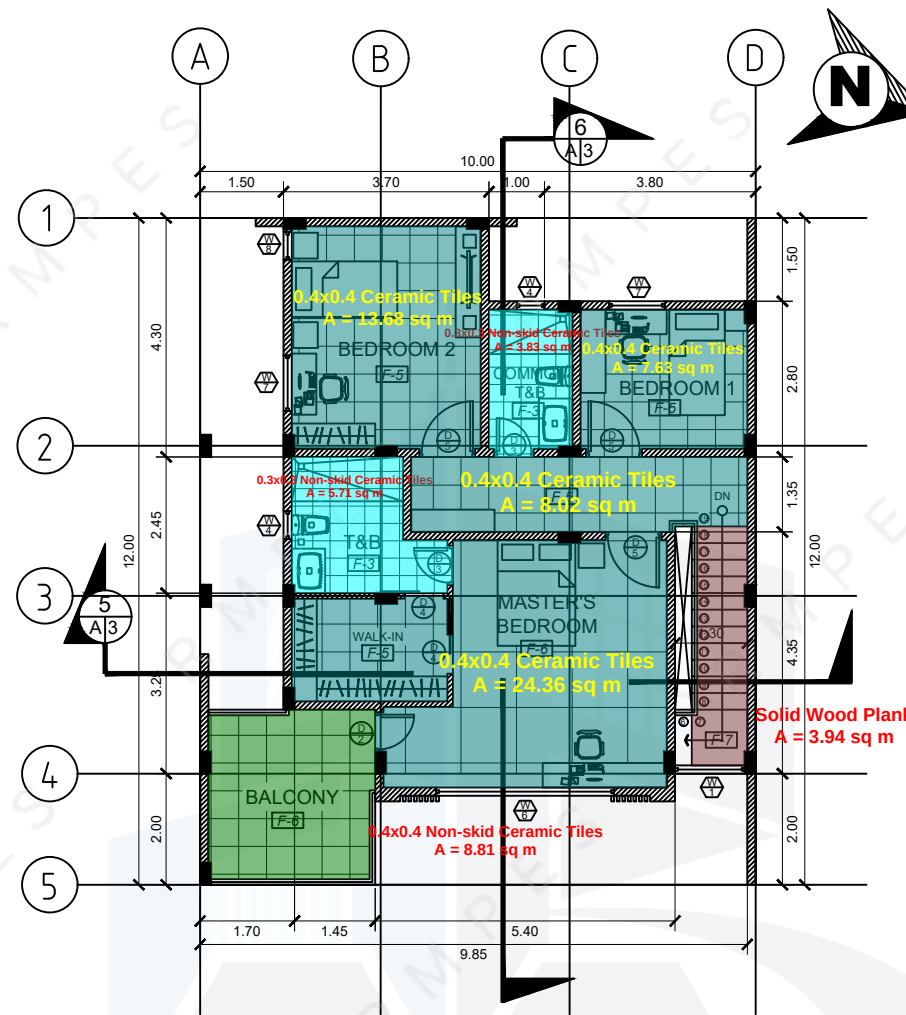

2
A-2
SECOND FLOOR PLAN
SCALE 1:75M

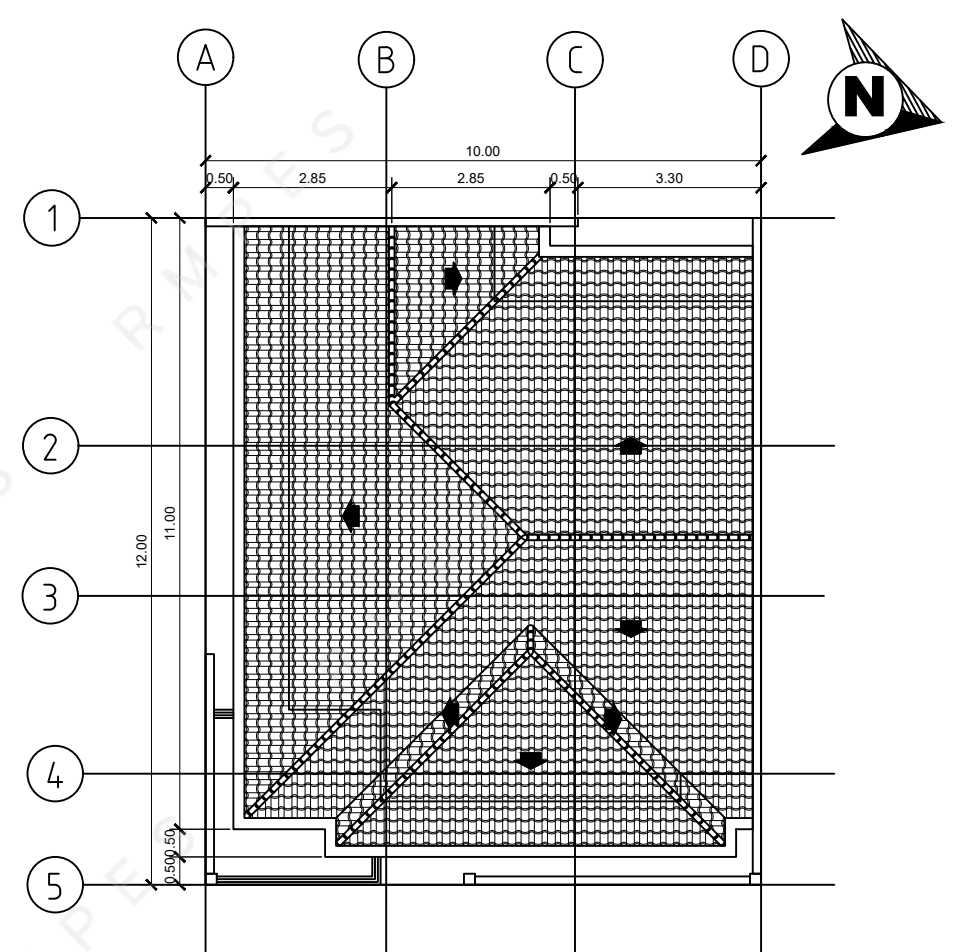

3
A-2
R O O F P L A N
SCALE 1:75M

SCHEDULE OF FLOOR FINISHES		
MARK	LOCATION	DESCRIPTION
F-1	LIVING, DINING, MASTERS BROOM, BEDROOMS, KITCHEN	600mm x 600mm CERAMIC TILES
F-2	CAR PARK, DIRTY KITCHEN	PLAIN CEMENT GOOVE FINISH
F-3	MASTER'S TOILET, COMMON T&B	300mm x 300mm NON-SKID CERAMIC TILES
F-4	MAIN ENTRANCE	300mm x 300mm NON-SKID TEXTURED CERAMIC TILES
F-5	BEDROOM 1, BEDROOM 2, HALLWAY	400mm x 400mm CERAMIC TILES
F-6	BALCONY	400mm x 400mm NON-SKID CERAMIC TILES
F-7	STAIRS	SOLID WOOD PLANK



SCHEDULE OF CEILING FINISHES		
MARK	LOCATION	DESCRIPTION
C-1	LIVING, DINING, MASTER'S BD ROOM, BEDROOMS, HALLWAY, MB TOILET, COMMON TOILET, KITCHEN	3.5MM FICEMBOARD ON METAL FURRING
C-2	ROOF CEILING EAVES	PVC SPANDREL

FLOOR FINISHES			
	Description	Quantity	Unit
	0.3x0.3 Non-skid Ceramic Tiles	14.71	sq m
	0.3x0.3 Non-skid Textured Ceramic Tiles	2.52	sq m
	0.4x0.4 Ceramic Tiles	53.70	sq m
	0.4x0.4 Non-skid Ceramic Tiles	8.81	sq m
	0.6x0.6 Ceramic Tiles	50.66	sq m
	Plain Cement Groove Finish	41.63	sq m
	Solid Wood Plank	5.74	sq m

	R.A. 545	PROJECT TITLE:			PROJECT OWNER/S:	SHEET CONTENT:	SHT. No.
	NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROPOSED TWO STOREY RESIDENTIAL	ARCHITECT			-GROUND FLOOR PLAN -SECOND FLOOR PLAN -ROOF PLAN -SCHEDULE OF FLOOR FINISHES -SCHEDULE OF CEILING FINISHES	A/2
		PROJECT LOCATION:	PRC REG. No.				
			PTR No.	DATE:			
			ISSUED				
			TIN No.				

GIRDER / BEAM SCHEDULE												
MARK	SIZE (mm)		BOTTOM BARS		TOP BARS				WEB BARS EACH FACE	STIRRUPS		REMARKS
	W	H	CONT. "A"	ADD'L. "B"	CONT. "C"	ADD'L. "DL"	ADD'L. "DR"	ADD'L. "E"		SIZE (mm)	SPACING FROM FACE OF SUPPORT OF SPAN (mm)	
FTB-1	200	300	2-Ø16	-	2-Ø16	-	-	-	-	-	1Ø50, 10Ø100, RESTØ200	
2B-1	200	400	2-Ø16	-	2-Ø16	1-Ø16	1-Ø16	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	
2B-2	150	300	2-Ø16	-	2-Ø16	-	-	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	
RB-1	150	300	2-Ø12	-	2-Ø12	-	-	-	1-Ø10	10	1Ø50, 10Ø100, RESTØ200	


SLAB SCHEDULE														
MARK	THICK- NESS (mm)	SHORT SPAN						LONG SPAN						REMARKS
		BOTTOM BARS (mm)		TOP BARS (mm)				BOTTOM BARS (mm)		TOP BARS (mm)				
				CONTINUOUS EDGE		DISCONTINUOUS EDGE				CONTINUOUS EDGE		DISCONTINUOUS EDGE		
		Ø	S	Ø	S	Ø	S	Ø	S	Ø	S	Ø	S	
S-1	100	10	250	10	250	10	250	10	250	10	250	10	250	ONE WAY

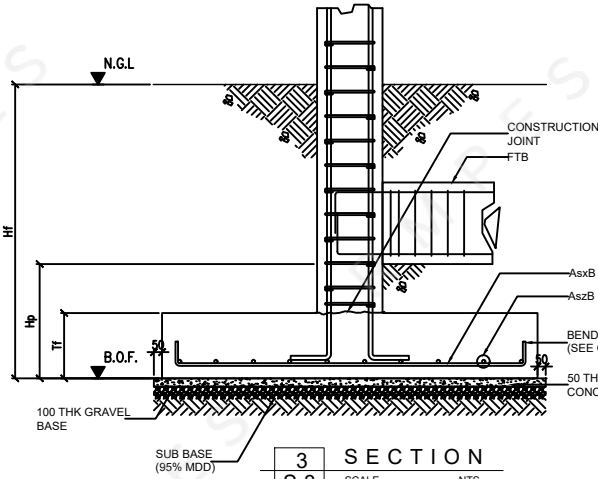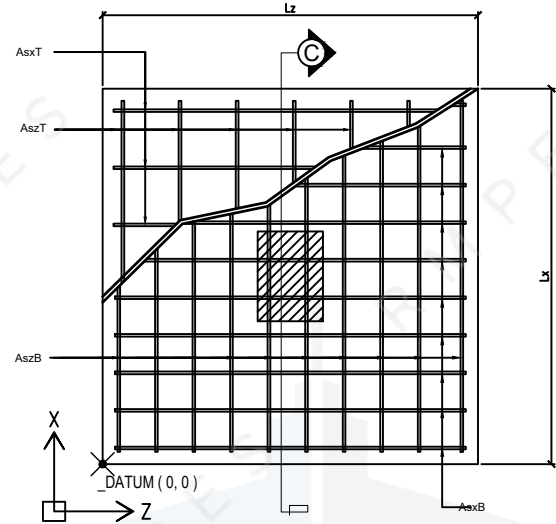

FOOTING MARK	FOOTING DIMENSION (mm)					REINFORCING BARS- SPACING			
	Lx (mm)	Lz (mm)	Hf (mm)	Hp (mm)	Tf (mm)	BOTTOM BARS	TOP BARS		
F-1	1100	1100	1400	500	300	Ø16-6 pcs	Ø16-6 pcs	-	-


**NOTE :
1.) SEE FOUNDATION PLAN FOR LOCATION OF FOOTING
2.) Hf - TO BE FINALIZED AFTER VERIFICATION OF ACTUAL SOIL CONDITION

7 TYPICAL FOOTING SCHEDULE
SCALE NTS

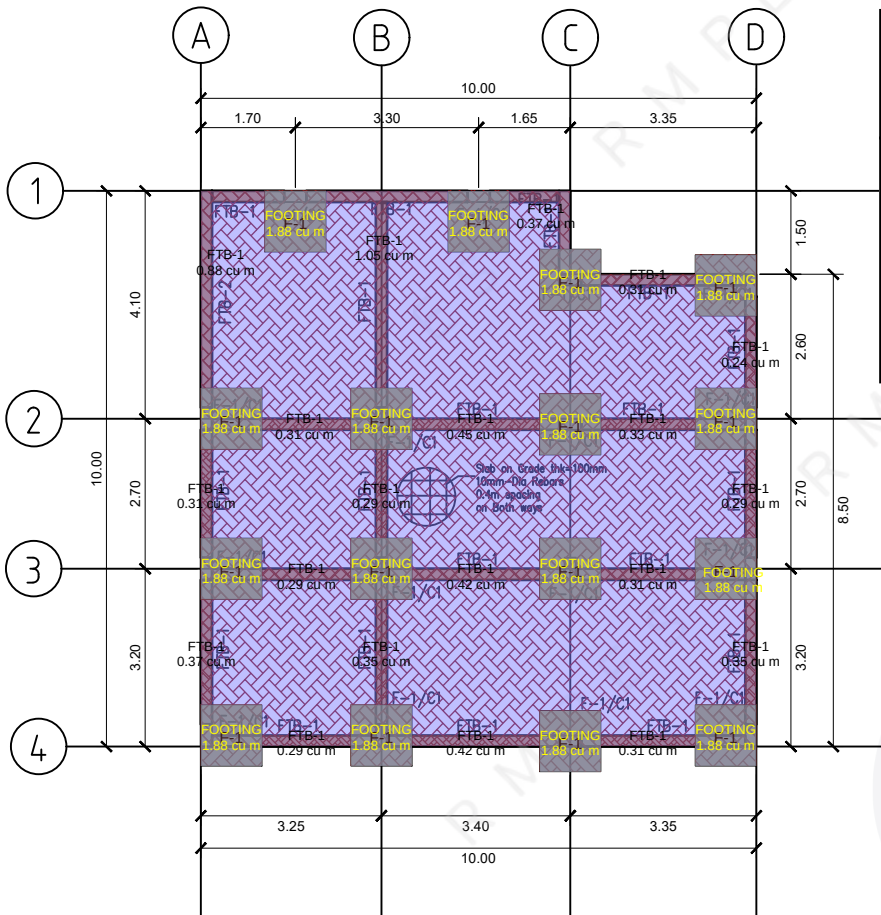


1 FOUNDATION PLAN
SCALE 1:75M

SITeworks			
	Description	Quantity	Unit
	BACKFILLING	72.82	cu m
	EXCAVATION	38.00	cu m
	GRAVEL BEDDING	9.70	cu m
	LEAN CONCRETE	1.89	cu m

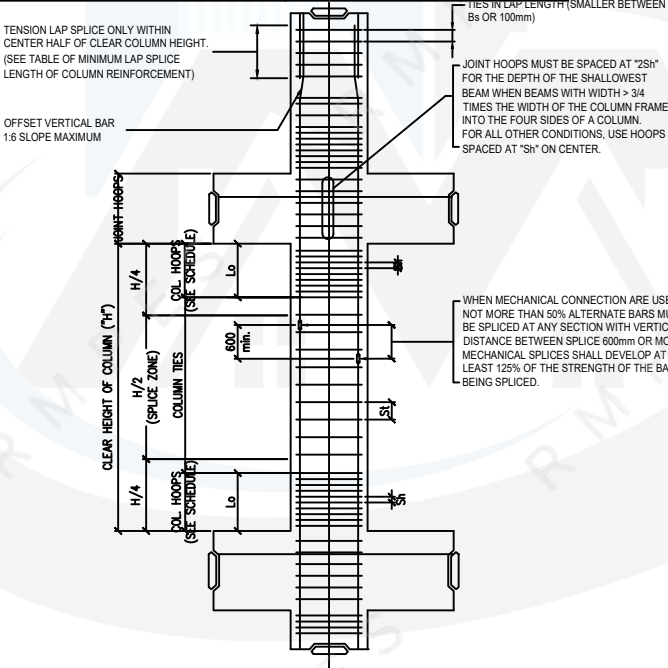

4 TYP. MOMENT FRAME CONCRETE COLUMN SPLICE DETAIL
SCALE NTS

COLUMN SCHEDULE			
	C1	C2	PC1
ROOF LEVEL			
FOUNDATION LEVEL TO SECOND FLOOR LEVEL			

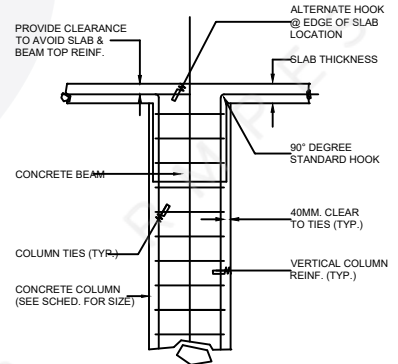

6 TYPICAL GRAVITY TOP OF CONCRETE COLUMN DETAIL
SCALE NTS


NOTES ON MECHANICAL COUPLERS:

- COUPLERS MUST BE LOCATED WITHIN THE MIDDLE HALF OF THE CLEAR HEIGHT OF THE COLUMN
- SUBMIT TEST RESULTS OF COUPLERS FOR ENGINEERS' APPROVAL
- AT LEAST 15% OF COUPLERS FOR EACH SIZE OF REBAR MUST BE TESTED FOR TENSILE STRENGTH TEST

NOTES:

Sh = HOOP AND SUPPLEMENTARY CROSSTIE SPACING NOT TO EXCEED 8s4 OR 100mm.
St = COLUMN TIE SPACING, NOT TO EXCEED 16th OF VERTICALS, C486b OF TIES, Bs OR 150mm, WHICHEVER IS LESSER.
Bs = SMALLER DIMENSION OF COLUMN CROSS SECTION.
Lo = LARGEST COLUMN DIMENSION, 1/6 OF CLEAR HEIGHT OR 450mm, WHICHEVER IS GREATER.
H = CLEAR HEIGHT OF COLUMN.

	R.A. 545	PROJECT TITLE:	CIVIL ENGINEER		PROJECT OWNER/S:	SHEET CONTENT:	SHT. No.
	NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROPOSED TWO STOREY RESIDENTIAL				-BEAM/ORDER SCHEDULE -SLAB SCHEDULE -FOUNDATION PLAN -FOOTING DETAIL -TYP. MOMENT FRAME CONCRETE COLUMN SPLICE DETAIL -TYPICAL GRAVITY TOP OF CONCRETE COLUMN DETAIL	
		PROJECT LOCATION:	PRC REG. No.				
			PTR No.	DATE:			
			ISSUED				
			TIN No.				

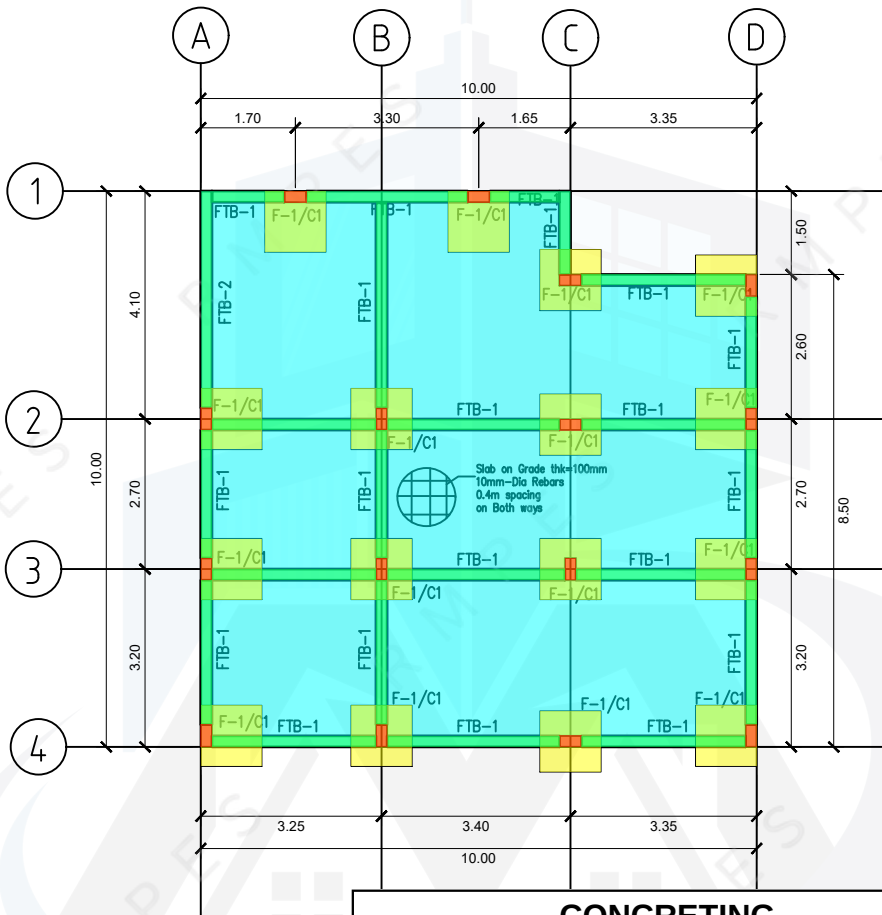


CONCRETING


	Description	Label	Quantity	Unit
	COLUMN	C1	6.68	cu m
	FOOTING	F-1	5.71	cu m
	FOOTING TIE BEAM	FTB-1	3.51	cu m
	SLAB ON GRADE	SOG	9.35	cu m

1
S-3

F-1
SOG

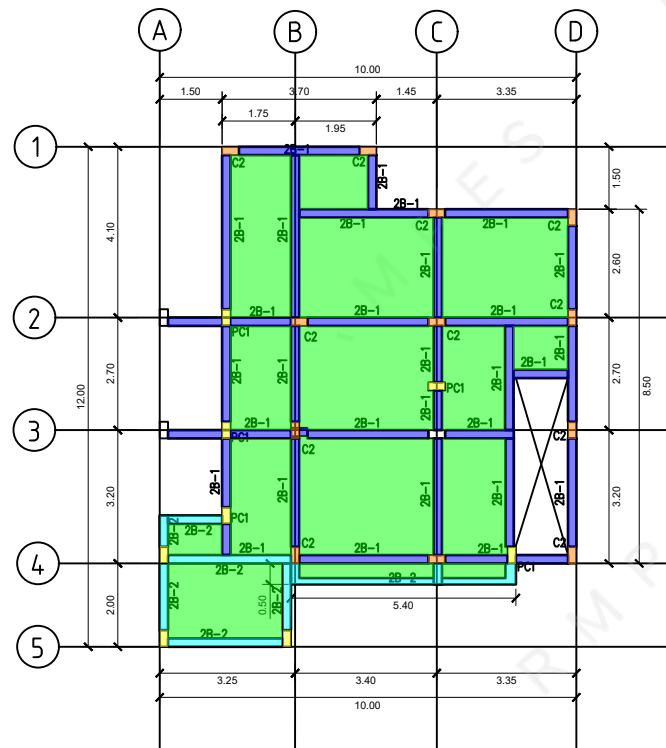


1 SECOND FLOOR PLAN
S-2 SCALE 1:100M

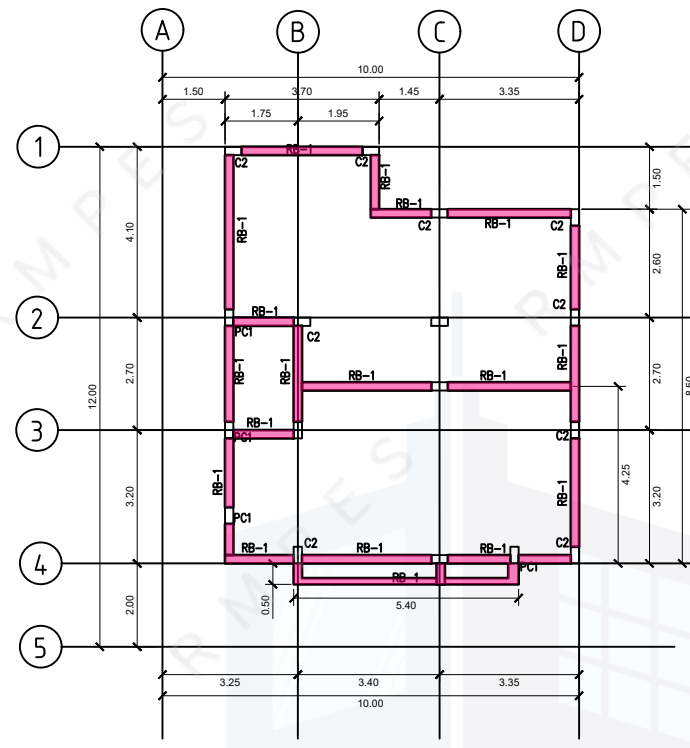


2 SECOND FLOOR ROOF BEAM PLAN
S-2 SCALE 1:100M

CONCRETING				
	Description	Label	Quantity	Unit
	COLUMN	C2 3.5 span	2.99	cu m
	COLUMN	PC1 3.5 span	1.25	cu m
	COLUMN	PC1 5.2 span	1.10	cu m
	ROOF BEAM	RB-1	2.65	cu m
	SUSPENDED BEAMS	2B-1	5.19	cu m
	SUSPENDED BEAMS	2B-2	0.90	cu m
	SUSPENDED SLABS	S-1	6.37	cu m


3 ROOF FRAMING PLAN
S-2 SCALE 1:100M

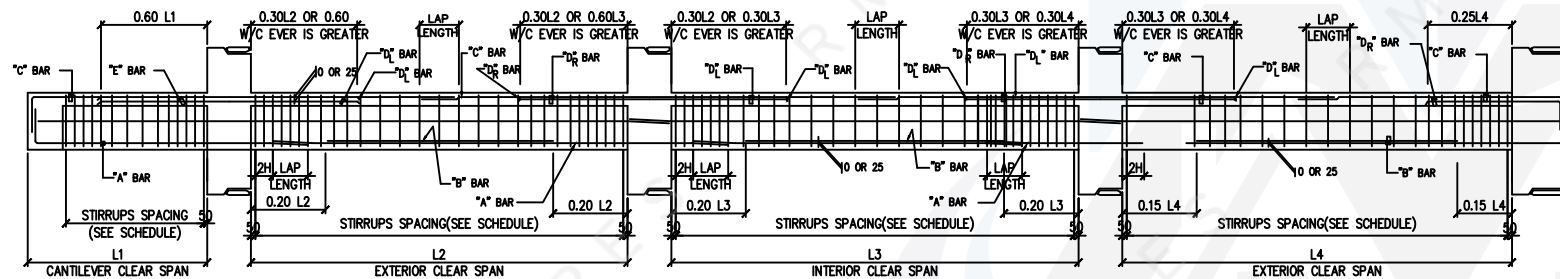


4 TYPICAL BEAM ELEVATION
S-4 SCALE NTS

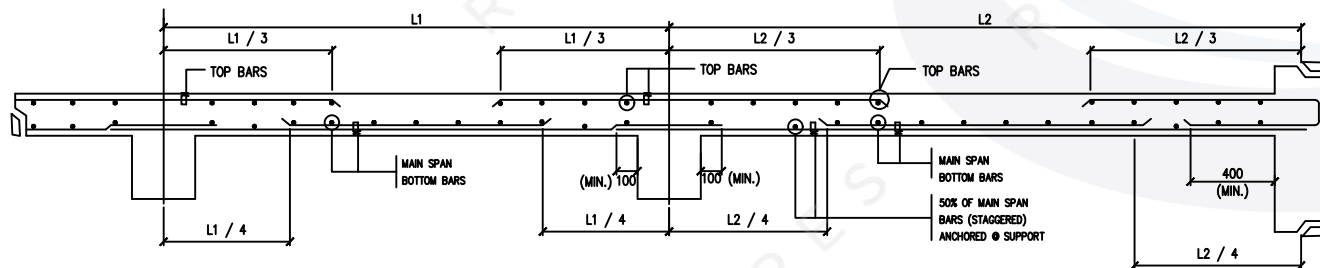

5 TYPICAL SLAB DETAIL
S-4 SCALE NTS

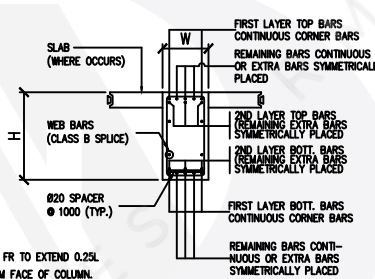


- NOTES:
- BEAM / GIRDER MARKS SHOULD BE READ FROM LEFT TO RIGHT.
 - THESE ADDITIONAL REBARS CAN BE PLACED AT LAYER NO.1, OR IF IT CANNOT BE ACCOMMODATED ALL AT 1ST LAYER, PLACE THE REMAINING ON THE NEXT LAYER.
 - ADOPT BIGGER REINFORCEMENT WHERE CONFLICT OF TOP & BOTTOM BARS OCCURS @ COMMON EDGE OF TWO ADJACENT BEAMS / GIRDERS.

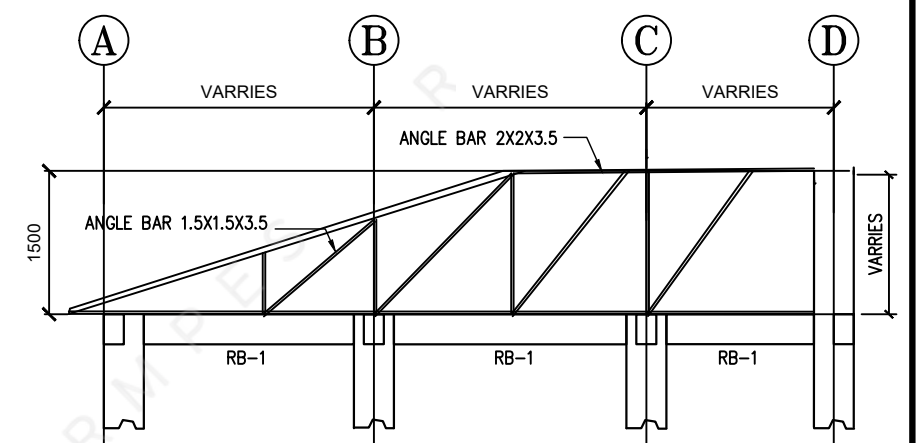


6 ROOF FRAMING SECTION
S-4 SCALE NTS

R.A. 545 NO PART OF THIS DRAWING MAY BE REPRODUCED BY ANY MEANS WITHOUT PROPER PERMISSION OR WRITTEN CONSENT COMING FROM THE ARCHITECT.	PROJECT TITLE:	PROJECT OWNER/S:		SHEET CONTENT:	SHT. No. S/4
	PROPOSED TWO STOREY RESIDENTIAL	CIVIL ENGINEER		-SECOND FLOOR FRAMING PLAN -SECOND FLOOR ROOF BEAM PLAN -ROOF FRAMING PLAN -TYPICAL BEAM ELEVATION -TYPICAL SLAB DETAIL	
	PROJECT LOCATION:	PRC REG. No.	DATE:		
		PTR No.			
		ISSUED			
		TIN No.			

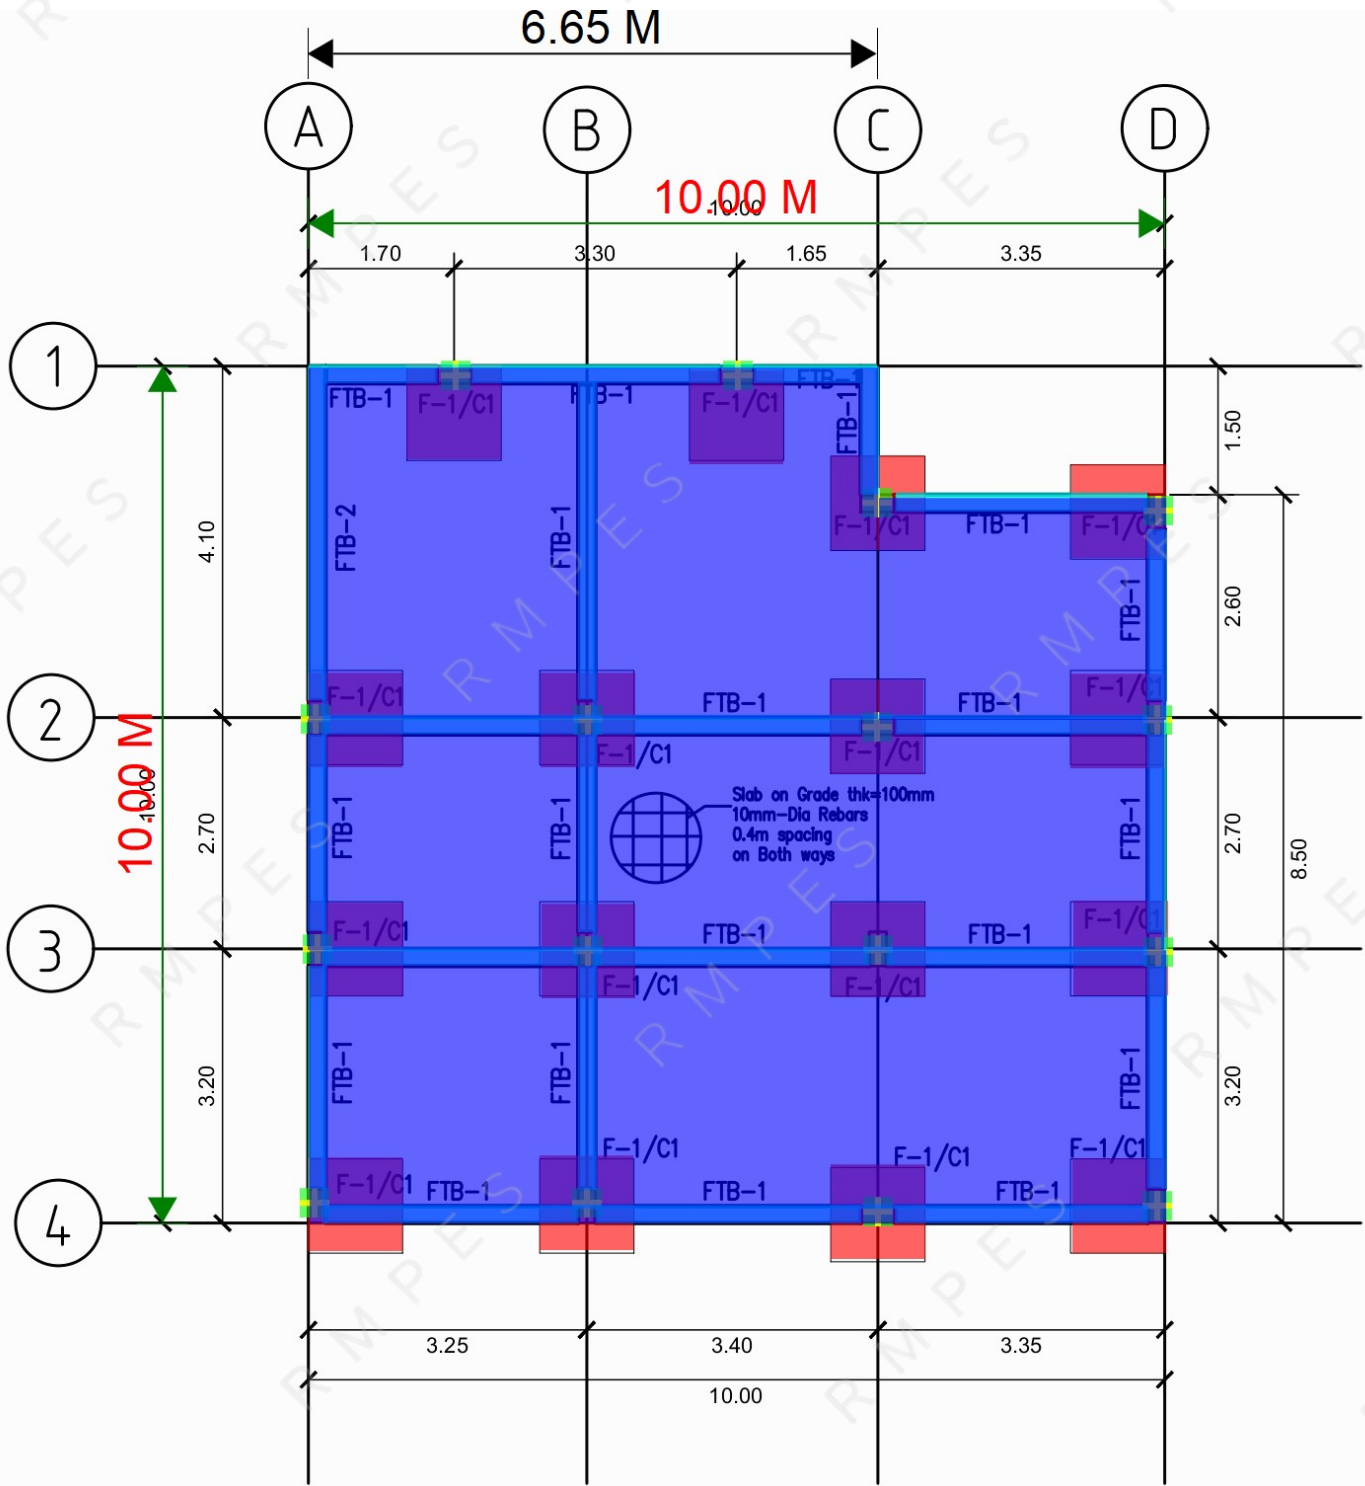

1	FOUNDATION PLAN
S-3	

SCALE 1:75M

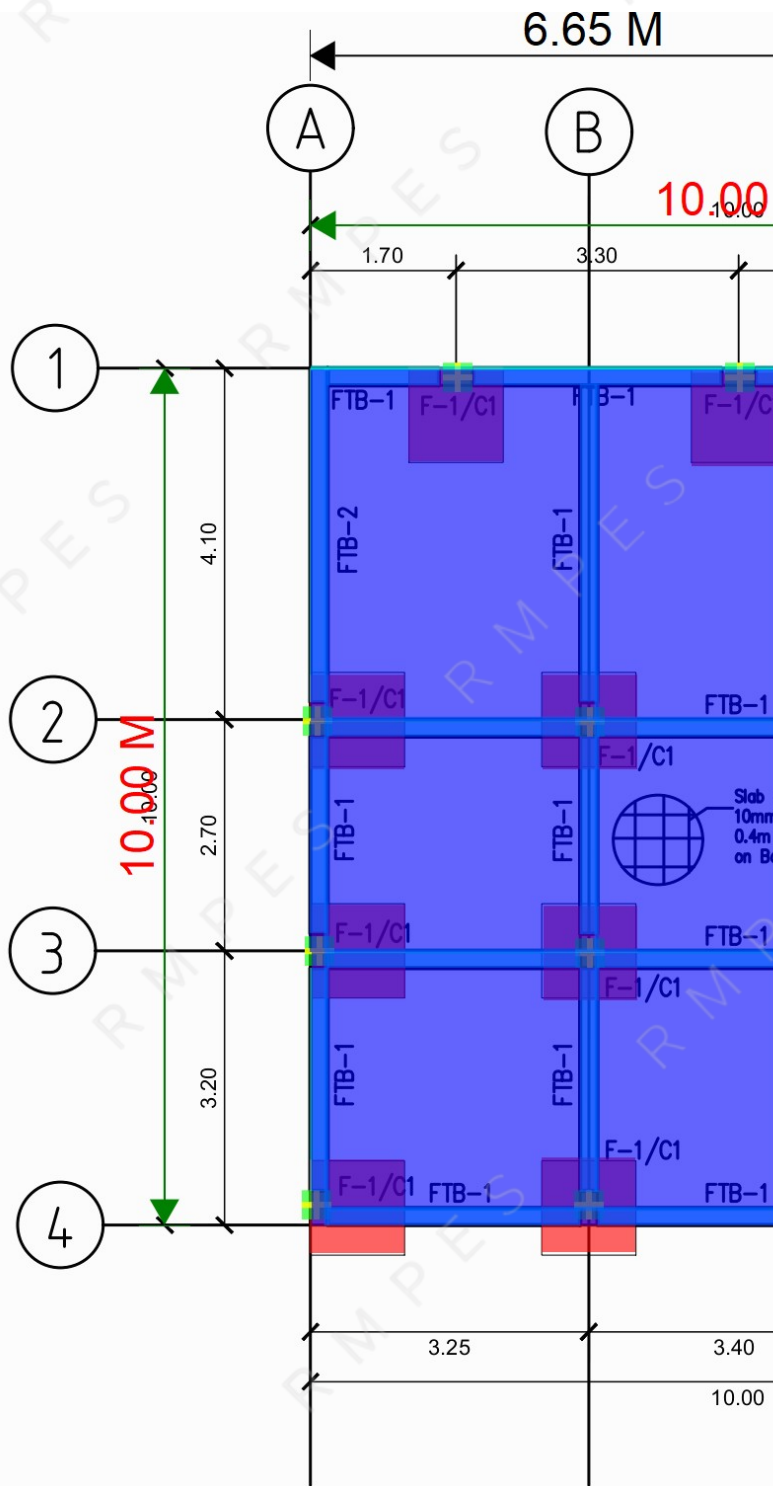


16mm F-1 Bot. Bar	245.8 M	
16mm C1 Vert. Bar	526.9 M	
10mm C1 Ties 1.1 Span	270.4 M	
10mm C1 Ties 4.1 Span	769.6 M	
16mm FTB-1 Main Bar	313.0 M	
10mm FTB-1 Stirrups 1A	30.0 M	
10mm FTB-1 Stirrups 1.1B	20.8 M	
10mm FTB-1 Stirrups 1.2B	21.2 M	
10mm FTB-1 Stirrups 1C	21.3 M	
10mm FTB-1 Stirrups 2A	21.9 M	
10mm FTB-1 Stirrups 2B	22.3 M	
10mm FTB-1 Stirrups 2C	21.9 M	
10mm FTB-1 Stirrups 3A	21.9 M	
10mm FTB-1 Stirrups 3B	22.3 M	
10mm FTB-1 Stirrups 3C	21.9 M	
10mm FTB-1 Stirrups 4A	21.9 M	
10mm FTB-1 Stirrups 4B	21.6 M	
10mm FTB-1 Stirrups 4C	21.9 M	
10mm FTB-1 Stirrups A2	18.5 M	
10mm FTB-1 Stirrups A3	20.0 M	
10mm FTB-1 Stirrups B1	24.6 M	
10mm FTB-1 Stirrups B2	19.2 M	
10mm FTB-1 Stirrups B3	19.9 M	
10mm FTB-1 Stirrups D1	17.7 M	
10mm FTB-1 Stirrups D2	19.1 M	
10mm FTB-1 Stirrups D3	20.0 M	
10mm SOG 1	152.4 M	
10mm SOG 2	52.1 M	
10mm SOG 3	148.8 M	
10mm SOG 4	171.8 M	

1
S-3

FOUNDATION PLAN

SCALE

1:75M

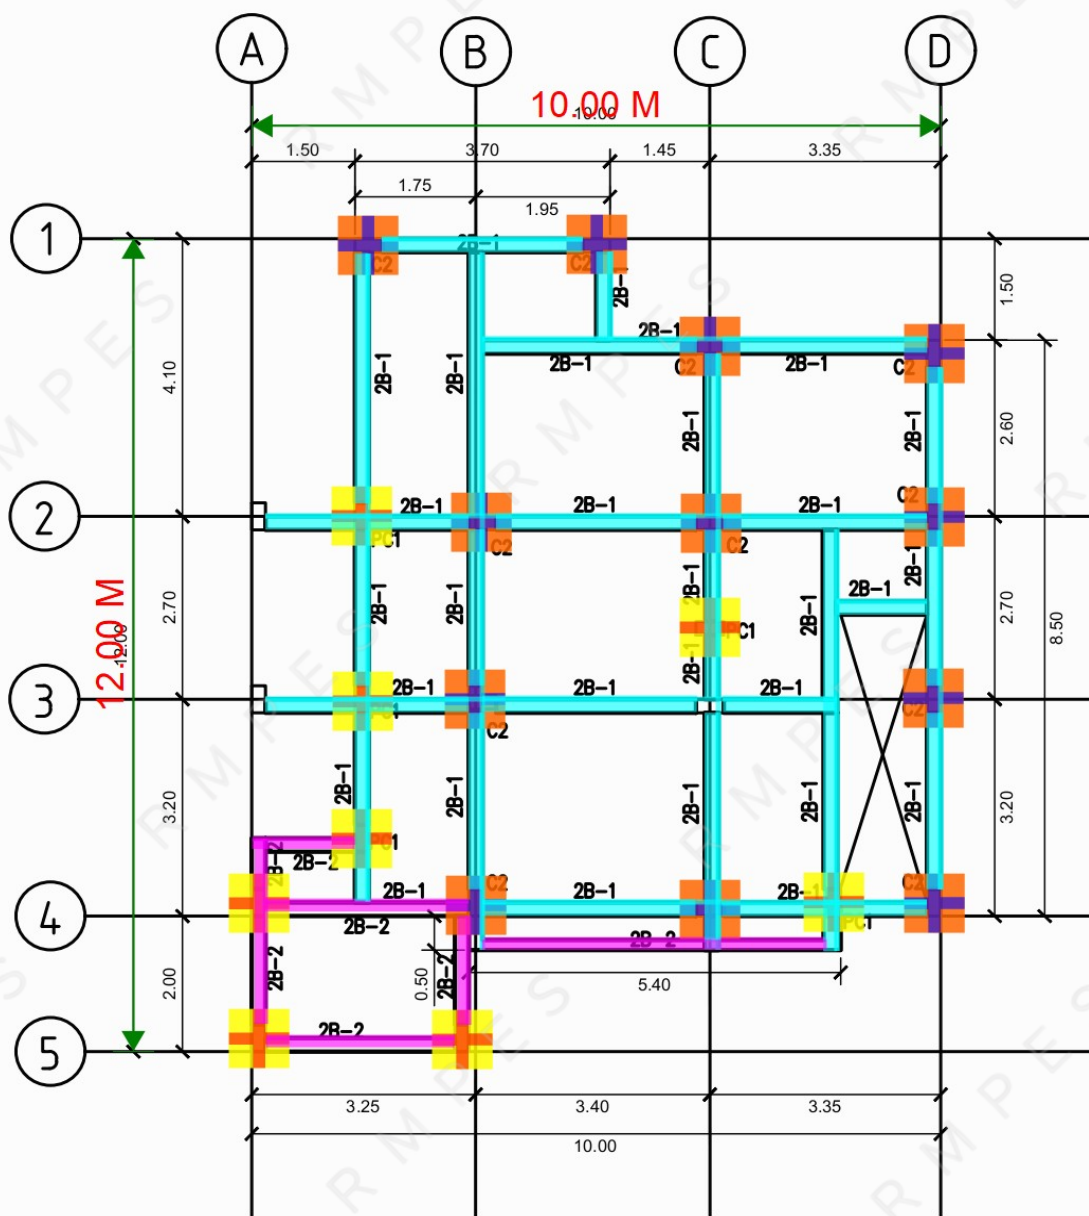


12mm PC1 Vert. Bar 1st	65.0 M
10mm PC1 Vert. Bar 5.2 Span	32.3 M
10mm PC1 Ties 5.2 Span	125.4 M
12mm PC1 Vert. Bar 3.5 span	74.3 M
10mm PC1 Vert. Bar 3.5 Span	36.8 M
10mm PC1 Ties 3.5 Span	156.8 M
12mm C2 Vert. Bar 3.5 span	178.3 M
10mm C2 Vert. Bar 3.5 Span	88.3 M
10mm C2 Ties 3.5 Span	376.2 M
16mm 2B-1 Main Bar	370.6 M
16mm 2B-2 Main Bar	82.1 M
16mm 2B-1 Extra Bar 1A	3.1 M
16mm 2B-1 Extra Bar 1B	3.3 M
16mm 2B-1 Extra Bar 1C	3.2 M
16mm 2B-1 Extra Bar 2A	3.2 M
16mm 2B-1 Extra Bar 2B	3.1 M
16mm 2B-1 Extra Bar 2C	3.2 M
16mm 2B-1 Extra Bar 3A	3.2 M
16mm 2B-1 Extra Bar 3B	3.3 M
16mm 2B-1 Extra Bar 3C	3.2 M
16mm 2B-1 Extra Bar 4B	3.3 M
16mm 2B-1 Extra Bar 4C	3.2 M
16mm 2B-1 Extra Bar A1	3.7 M
16mm 2B-1 Extra Bar A2	2.8 M
16mm 2B-1 Extra Bar A3	3.1 M
16mm 2B-1 Extra Bar B1	3.8 M
16mm 2B-1 Extra Bar B2	2.7 M
16mm 2B-1 Extra Bar B3	3.6 M
16mm 2B-1 Extra Bar B'1	2.1 M
16mm 2B-1 Extra Bar C1	2.8 M
16mm 2B-1 Extra Bar C2	2.9 M
16mm 2B-1 Extra Bar C3	3.6 M
16mm 2B-1 Extra Bar C'2	5.3 M
16mm 2B-1 Extra Bar D1	2.5 M
16mm 2B-1 Extra Bar D2	2.8 M
16mm 2B-1 Extra Bar D3	3.0 M
10mm 2B-1 Stirrups 1A	27.0 M
10mm 2B-1 Stirrups 1B	27.9 M
10mm 2B-1 Stirrups 1C	27.4 M
10mm 2B-1 Stirrups 2A	27.6 M
10mm 2B-1 Stirrups 2B	26.2 M
10mm 2B-1 Stirrups 2C	27.5 M
10mm 2B-1 Stirrups 3A	27.5 M
10mm 2B-1 Stirrups 3B	27.9 M
10mm 2B-1 Stirrups 3C	27.4 M
10mm 2B-1 Stirrups 4B	27.2 M
10mm 2B-1 Stirrups 4C	27.3 M
10mm 2B-1 Stirrups A1	30.1 M
10mm 2B-1 Stirrups A2	23.3 M
10mm 2B-1 Stirrups A3	26.3 M
10mm 2B-1 Stirrups B1	31.1 M
10mm 2B-1 Stirrups B2	24.1 M
10mm 2B-1 Stirrups B3	25.1 M
10mm 2B-1 Stirrups B'1	22.3 M
10mm 2B-1 Stirrups C1	24.3 M
10mm 2B-1 Stirrups C2	24.3 M
10mm 2B-1 Stirrups C3	29.1 M
10mm 2B-1 Stirrups C'2	42.5 M
10mm 2B-1 Stirrups D1	22.1 M
10mm 2B-1 Stirrups D2	23.3 M
10mm 2B-1 Stirrups D3	25.2 M
10mm 2B-2 Stirrups 4A	23.2 M
10mm 2B-2 Stirrups 4B	25.4 M
10mm 2B-2 Stirrups 5A	17.8 M
10mm 2B-2 Stirrups A3	17.8 M
10mm 2B-2 Stirrups B4	15.3 M

1
S-2

SECOND FLOOR PLAN


SCALE

1:100M

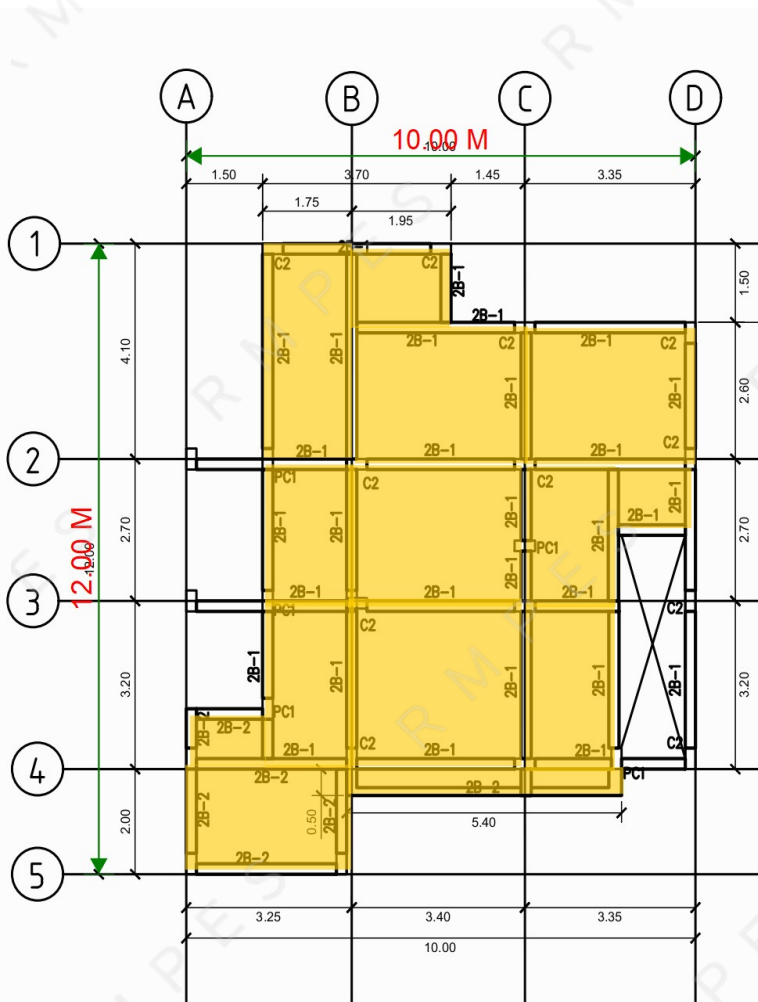


1 SECOND FLOOR PLAN
S-2 SCALE 1:100M

10mm S-1 Rebar 1	99.6 M
10mm S-1 Rebar 2	49.8 M
10mm S-1 Rebar 3	143.4 M
10mm S-1 Rebar 4	142.4 M
10mm S-1 Rebar 5	77.4 M
10mm S-1 Rebar 6	146.1 M
10mm S-1 Rebar 7	77.4 M
10mm S-1 Rebar 8	18.2 M
10mm S-1 Rebar 9	90.8 M
10mm S-1 Rebar 10	171.4 M
10mm S-1 Rebar 11	90.8 M
10mm S-1 Rebar 12	26.4 M
10mm S-1 Rebar 13	103.4 M
10mm S-1 Rebar 14	44.7 M
12mm RB-1 Main Rebar	238.8 M
10mm RB-1 Stirrups 1A	18.1 M
10mm RB-1 Stirrups 1B	15.3 M
10mm RB-1 Stirrups 1C	19.1 M
10mm RB-1 Stirrups 2A	14.9 M
10mm RB-1 Stirrups 2B	19.4 M
10mm RB-1 Stirrups 2C	18.5 M
10mm RB-1 Stirrups 3A	15.0 M
10mm RB-1 Stirrups 4A	15.9 M
10mm RB-1 Stirrups 4B	18.8 M
10mm RB-1 Stirrups 4C	15.4 M
10mm RB-1 Stirrups 4D	15.9 M
10mm RB-1 Stirrups 5B	25.7 M
10mm RB-1 Stirrups A1	20.8 M
10mm RB-1 Stirrups A2	16.6 M
10mm RB-1 Stirrups A3	18.1 M
10mm RB-1 Stirrups B1	15.4 M
10mm RB-1 Stirrups B2	16.2 M
10mm RB-1 Stirrups B4	15.4 M
10mm RB-1 Stirrups C4	15.1 M
10mm RB-1 Stirrups D1	15.3 M
10mm RB-1 Stirrups D2	16.2 M
10mm RB-1 Stirrups D3	17.4 M
10mm RB-1 Stirrups D4	15.4 M

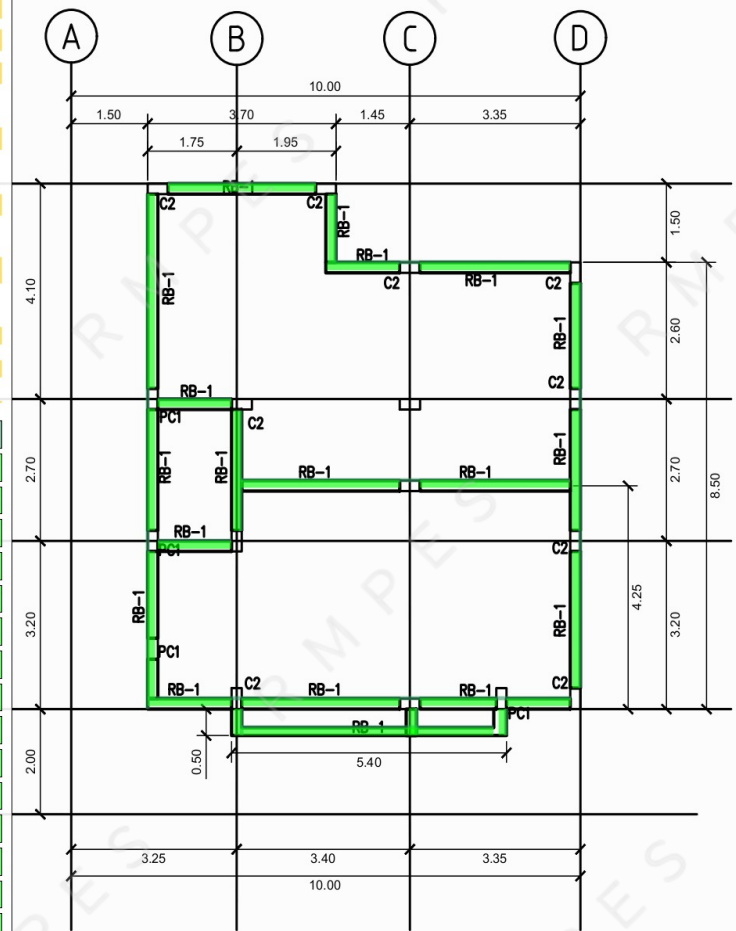

2 SECOND FLOOR ROOF BEAM PLAN
S-2 SCALE 1:100M

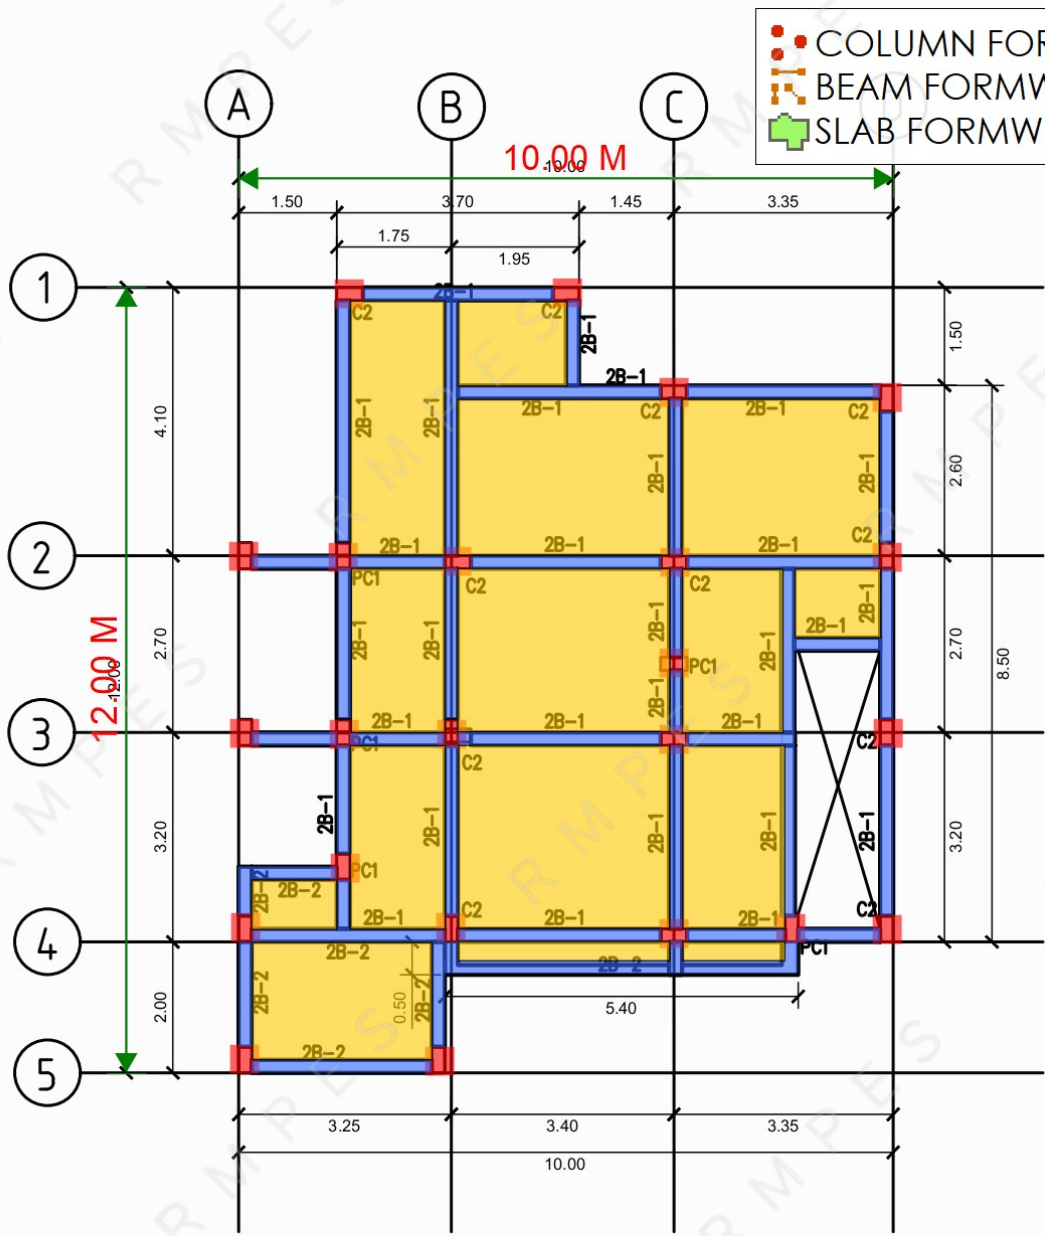

1
S-2

SECOND FLOOR PLAN

SCALE

1:100M